

No.	Name	Material	Remark
1	Surface material, upper part	Special aluminum alloy	thickness 0.6 mm
2	Surface material, lower part	Stainless steel	thickness 0.8 mm
3	Window	Acrylic resin	color: transparent/thickness 4.0 mm
4	Window frame	Aluminum	color: alumite silver
5	Screw	Stainless steel	+A truss tapping/5x18
6	Hinge cover	ABS resin	130 mm x 97 mm x 25.7 mm
7	Hinge cover screw	Stainless steel	+roundhead in light grey/M4x8
8	Upper bracket in frame side	Steel SPC	Unichrome plating
9	Screw for bracket in frame side	Stainless steel	+flathead/M6 x 15
10	Lower bracket in frame side	Stainless steel	-
11	Screw for lower bracket in frame side	Stainless steel, PVC	+A flathead tapping 6 x 30, with PYplug 8 x 32
12	C-channel	Aluminum	NA Channel P, color: alumite silver
13	Opening frame for door installation (3-sided-frame)	-	Prepared by customers

Core of door • • lumber core
 Opening frame for door installation (3-sided-frame) and back plate for reinforcement should be prepared by customer.

Possible dimensions for production

	Single door	Double door
Opening width (W)	415 ≤ W ≤ 1200	830 ≤ W ≤ 2400
Opening height (H)	800 ≤ H ≤ 2400	


* Windows cannot generally be installed in the door with DW < 400 OR DH < 900.

Window size

Door width (DW)	Window width	Window height
555 ≤ DW	355	420
400 ≤ DW < 555	200	420
DW < 400	No window	


*Window sizes other than the above can be used depending on the height (H) and position of the window (to be confirmed)
 * Minimum opening for window: w200 h250
 * Vertical position of window: requires minimum 500 from door panel bottom edge and minimum 200 from door panel upper edge.

Code	How many	Where to install
①	-	~
Type	SWING DOOR SCP-5 (double door)	

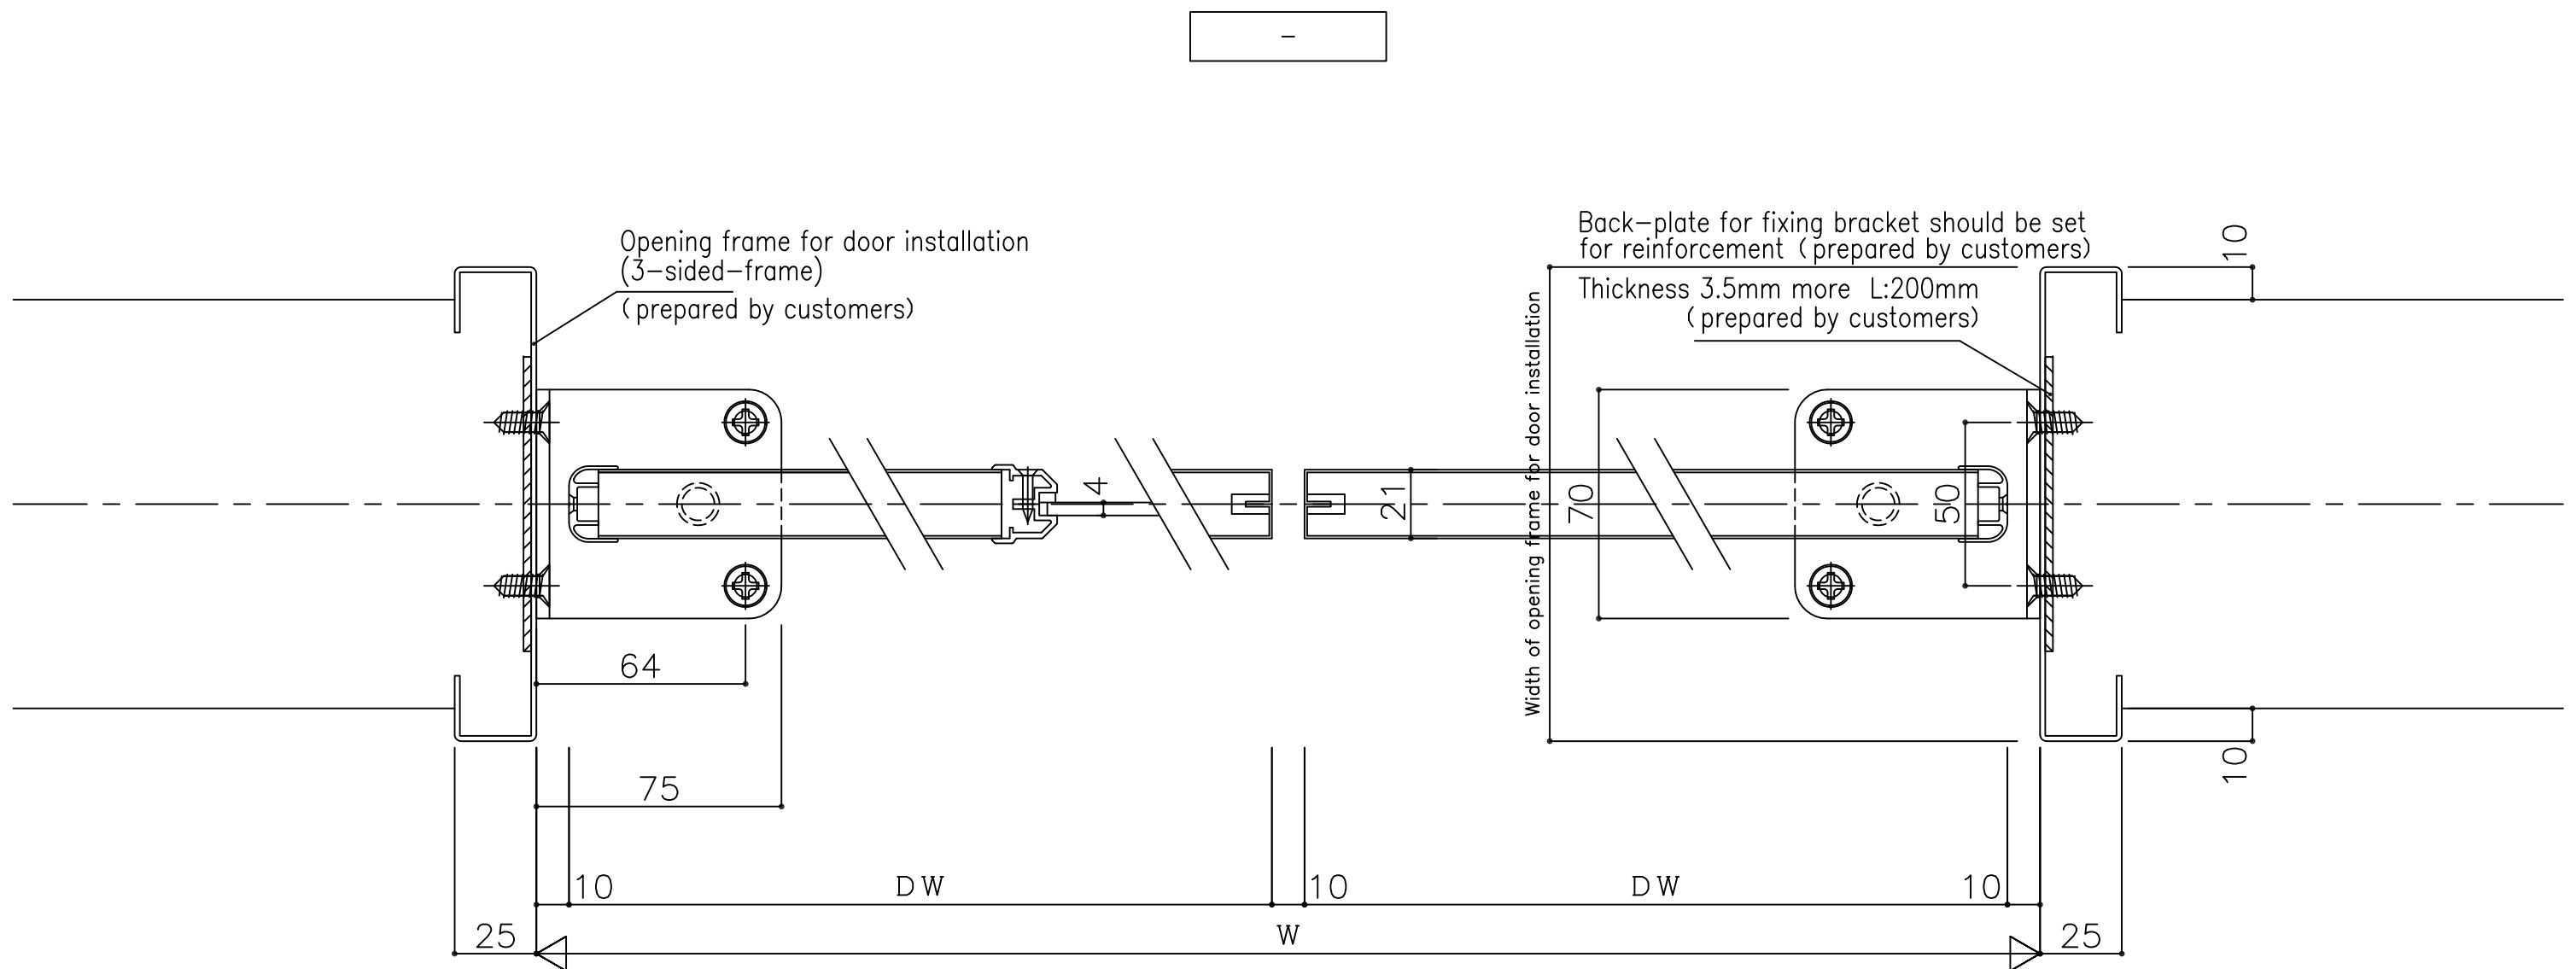


-

-



-	-		Drawing name UNIFLOW SWING DOOR SCP-5 (double door) cross section	#式自打 3-2-JO	-	-	Scale 1/2	-
-	-						Drawing No.	-
-	-						Date	- . - . -

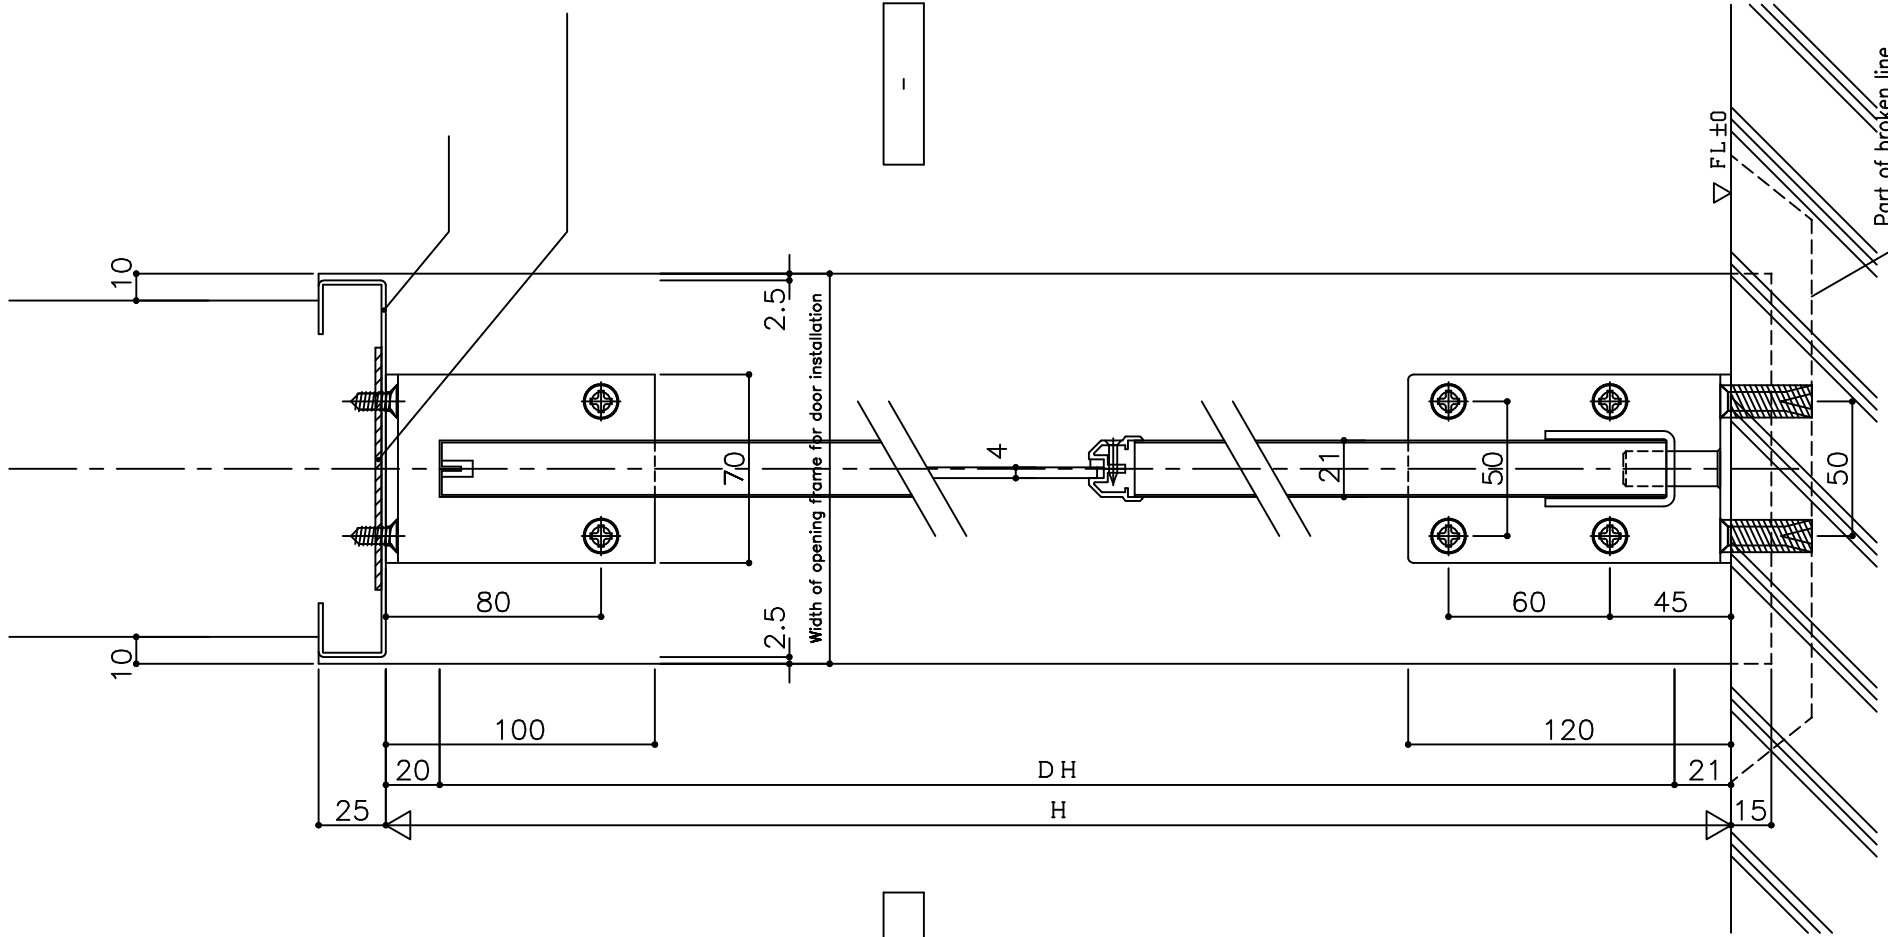

-

-





----	-
.....	-
.....	-
.....	-
.....	-

Drawing name
UNIFLOW SWING DOOR
SCP-5
vertical section



Scale	-
1/2	Drawing No. -
/	Date - . - . -

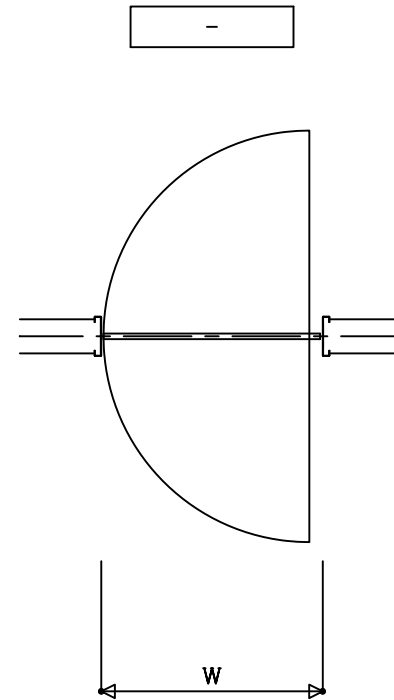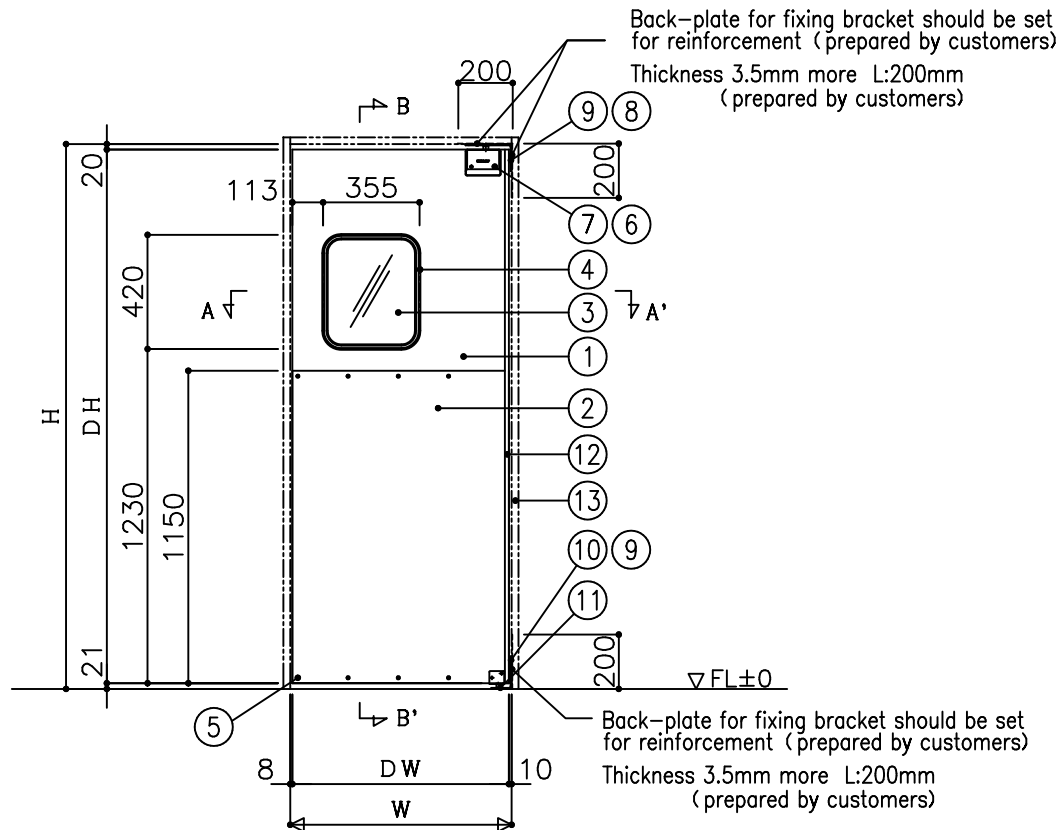

No.	Name	Material	Remark
1	Surface material, upper part	Special aluminum alloy	thickness 0.6 mm
2	Surface material, lower part	Stainless steel	thickness 0.8 mm
3	Window	Acrylic resin	color: transparent/thickness 4.0 mm
4	Window frame	Aluminum	color: alumite silver
5	Screw	Stainless steel	+A truss tapping/5x18
6	Hinge cover	ABS resin	130 mm x 97 mm x 25.7 mm
7	Hinge cover screw	Stainless steel	+roundhead in light grey/M4x8
8	Upper bracket in frame side	Steel SPC	Unichrome plating
9	Screw for bracket in frame side	Stainless steel	+flathead/M6 x 15
10	Lower bracket in frame side	Stainless steel	-
11	Screw for lower bracket in frame side	Stainless steel, PVC	+A flathead tapping 6 x 30, with PYplug 8 x 32
12	C-channel	Aluminum	NA Channel P, color: alumite silver
13	Opening frame for door installation (3-sided-frame)	-	Prepared by customers

Core of door • lumber core
 Opening frame for door installation (3-sided-frame) and back plate for reinforcement should be prepared by customer.

Possible dimensions for production

	Single door	Double door
Opening width (W)	415 ≤ W ≤ 1200	830 ≤ W ≤ 2400
Opening height (H)	800 ≤ H ≤ 2400	

* Windows cannot generally be installed in the door with DW < 400 OR DH < 900.

Window size

Door width (DW)	Window width	Window height
555 ≤ DW	355	420
400 ≤ DW < 555	200	420
DW < 400	No window	



* Window sizes other than the above can be used depending on the height (H) and position of the window (to be confirmed)
 * Minimum opening for window: w200 h250
 * Vertical position of window: requires minimum 500 from door panel bottom edge and minimum 200 from door panel upper edge.

Code	How many	Where to install
①	-	~
Type	SWING DOOR SCP-5 (single door)	

Drawing name
 UNIFLOW SWING DOOR
 SCP-5 (single door)
 Image of basic installation



Scale	
1/20	-
	Drawing No -
	Date - . - .

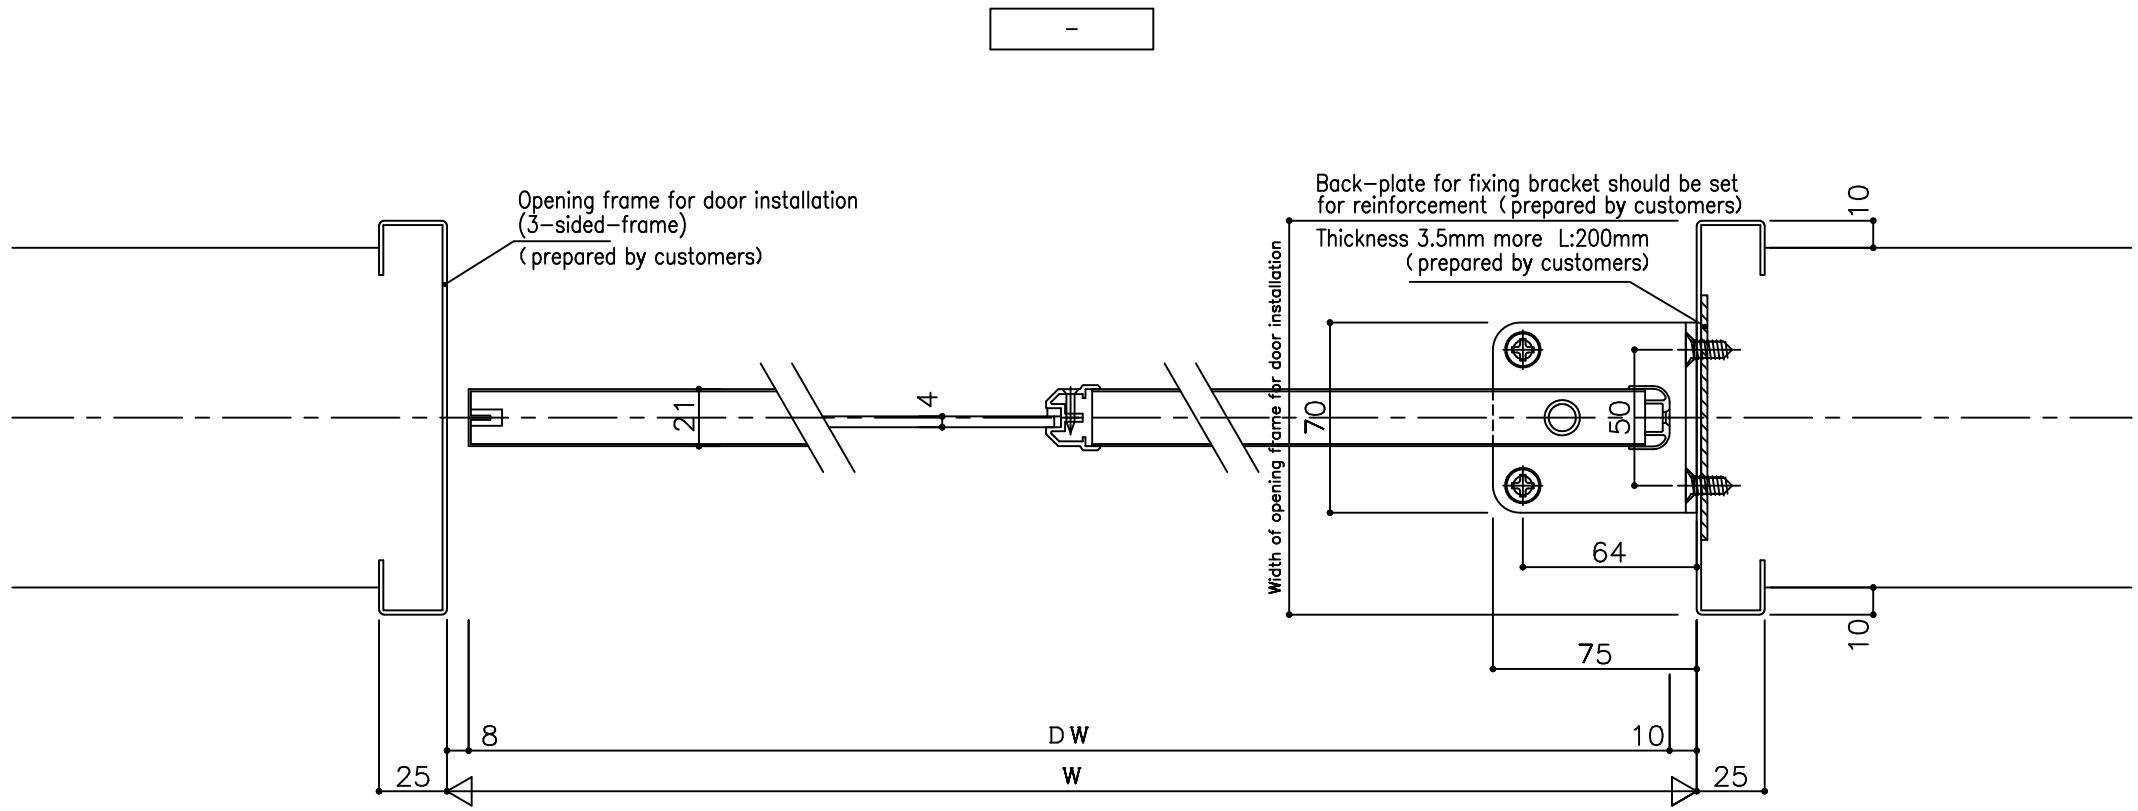


—	•	•	•	—
•	•	•	•	•
•	•	•	•	•
•	•	•	•	•

Drawing name
UNIFLOW SWING DOOR
SCP-5 (single door)
cross section



Scale	—
1/2	Drawing No. —
/	Date — • — • —

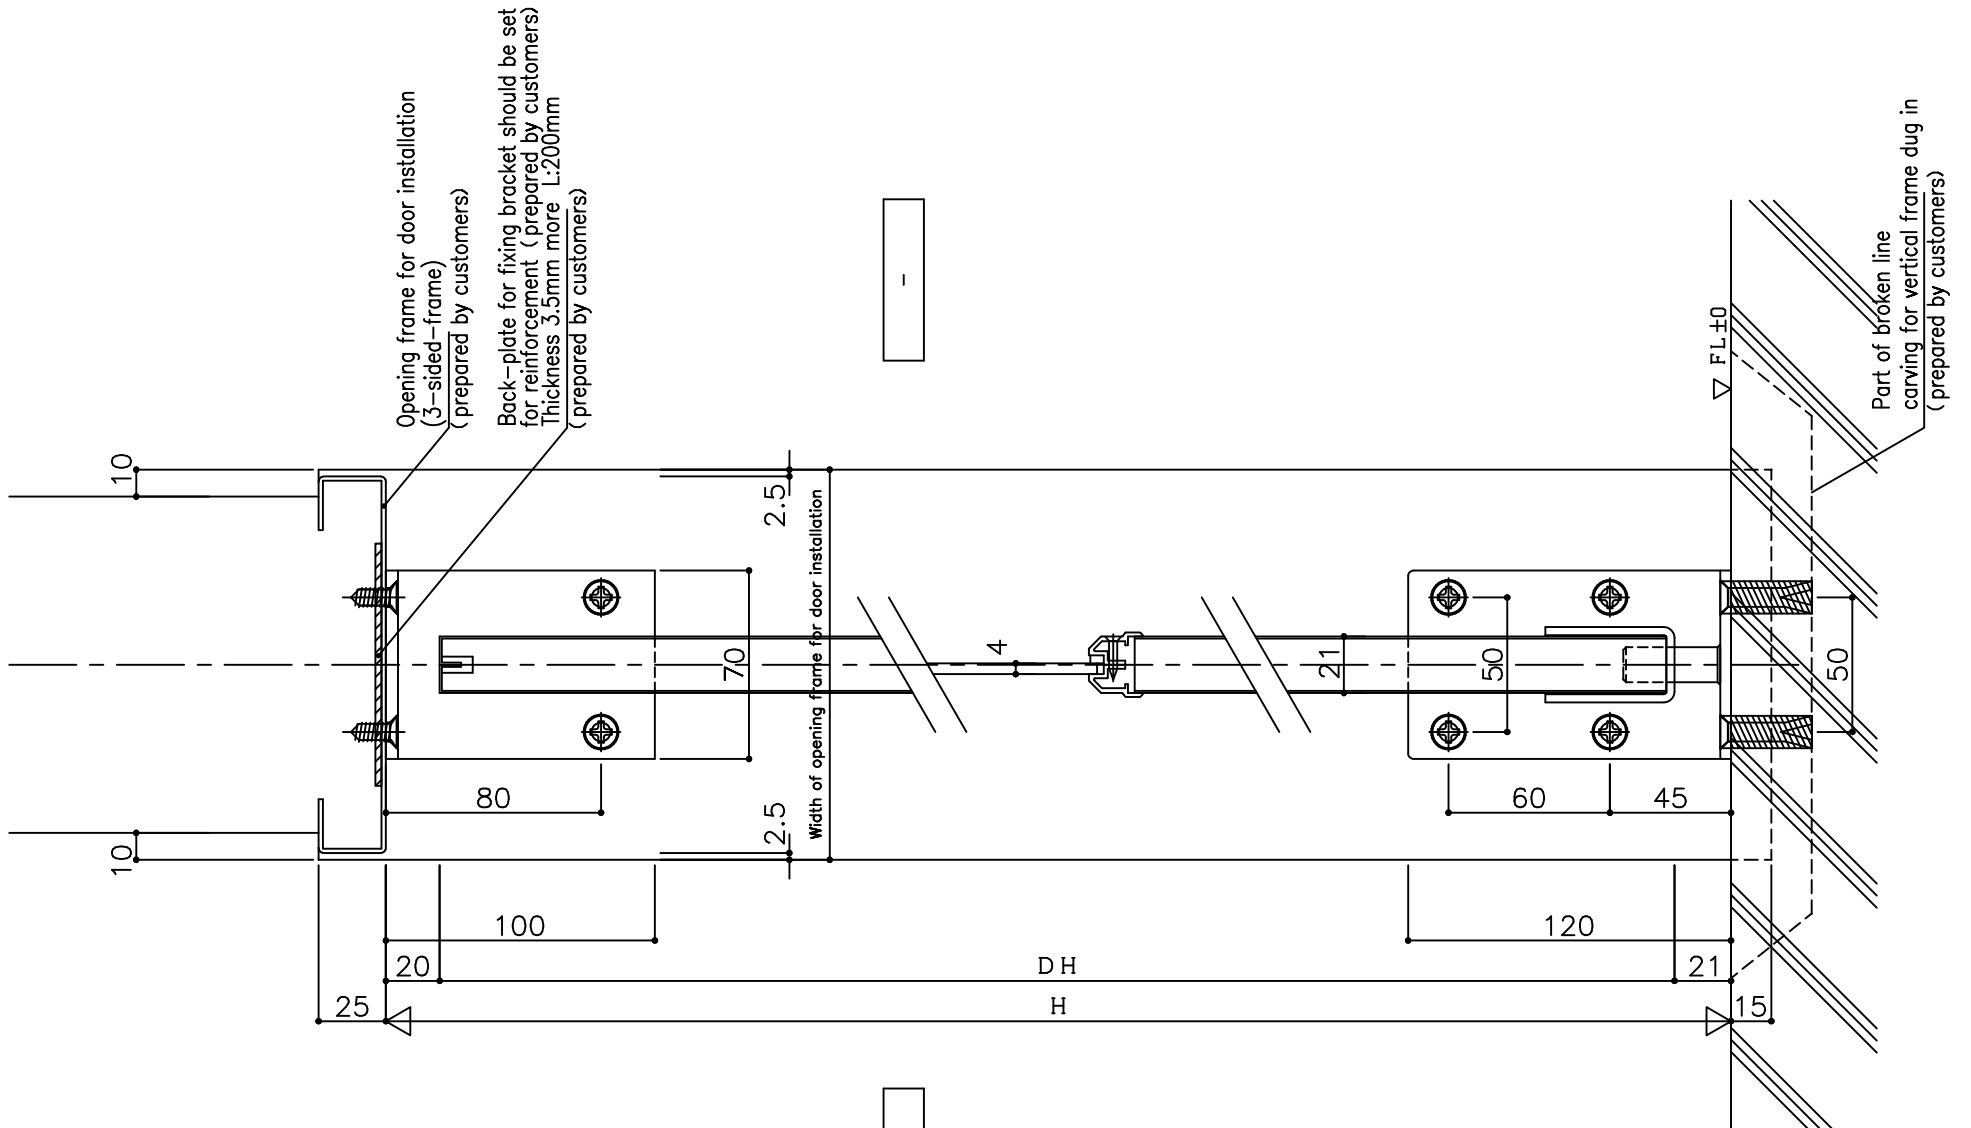


•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•

Drawing name
 UNIFLOW SWING DOOR
 SCP-5
 vertical section




Scale	1/2	-	-
Drawing No.	-	-	-
Date	-	-	-

Back-plate for fixing bracket should be set for reinforcement (prepared by customers)
Thickness 3.5mm more L:200mm (prepared by customers)

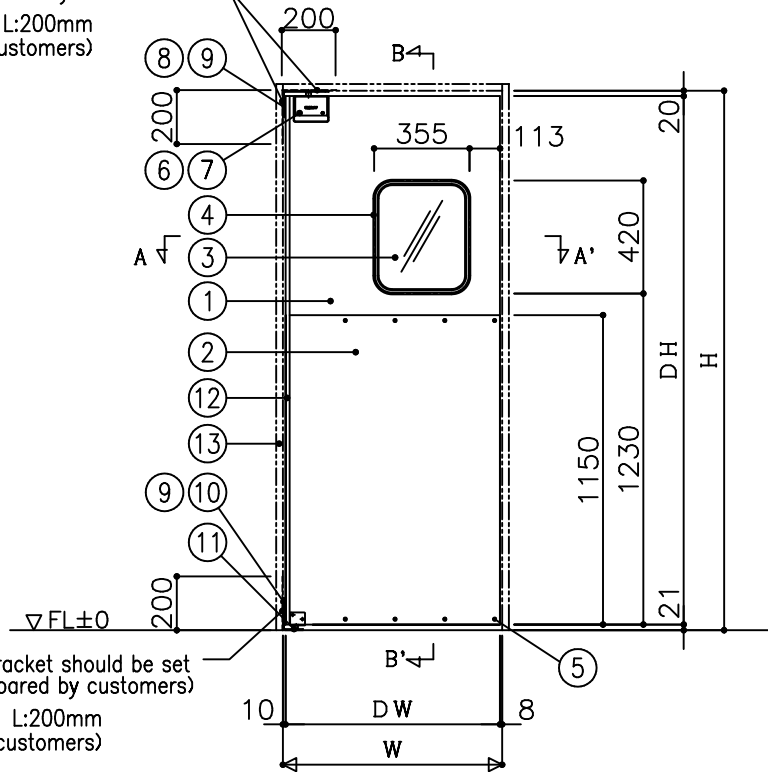

Back-plate for fixing bracket should be set for reinforcement (prepared by customers)
Thickness 3.5mm more L:200mm (prepared by customers)

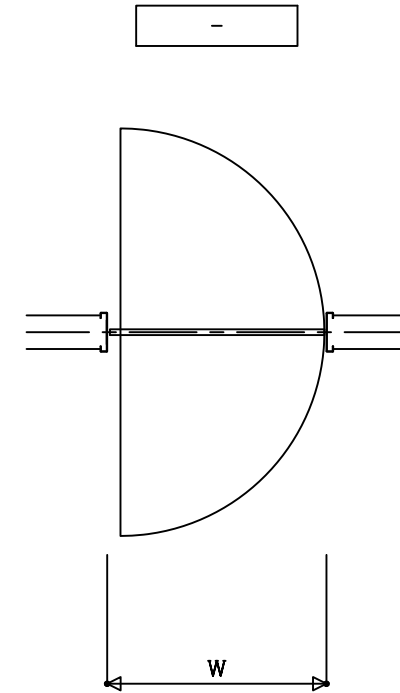

No.	Name	Material	Remark
1	Surface material, upper part	Special aluminum alloy	thickness 0.6 mm
2	Surface material, lower part	Stainless steel	thickness 0.8 mm
3	Window	Acrylic resin	color: transparent/thickness 4.0 mm
4	Window frame	Aluminum	color: alumite silver
5	Screw	Stainless steel	+A truss tapping/5x18
6	Hinge cover	ABS resin	130 mm x 97 mm x 25.7 mm
7	Hinge cover screw	Stainless steel	+roundhead in light grey/M4x8
8	Upper bracket in frame side	Steel SPC	Unichrome plating
9	Screw for bracket in frame side	Stainless steel	+flathead/M6 x 15
10	Lower bracket in frame side	Stainless steel	-
11	Screw for lower bracket in frame side	Stainless steel, PVC	+A flathead tapping 6 x 30, with PYplug 8 x 32
12	C-channel	Aluminum	NA Channel P, color: alumite silver
13	Opening frame for door installation (3-sided-frame)	-	Prepared by customers

Core of door • • lumber core
Opening frame for door installation (3-sided-frame) and back plate for reinforcement should be prepared by customer.

Possible dimensions for production

	Single door	Double door
Opening width (W)	415 ≤ W ≤ 1200	830 ≤ W ≤ 2400
Opening height (H)	800 ≤ H ≤ 2400	

* Windows cannot generally be installed in the door with DW < 400 OR DH < 900.

Window size

Door width (DW)	Window width	Window height
555 ≤ DW	355	420
400 ≤ DW < 555	200	420
DW < 400	No window	

*Window sizes other than the above can be used depending on the height (H) and position of the window (to be confirmed)

* Minimum opening for window: w200 h250

* Vertical position of window: requires minimum 500 from door panel bottom edge and minimum 200 from door panel upper edge.


Code	How many	Where to install
①	-	~
Type	SWING DOOR SCP-5 (single door)	

-	-	-	-	-
.
.
.
.

Drawing name
UNIFLOW SWING DOOR
SCP-5 (single door)
Image of basic installation



Scale	-
1/20	Drawing No -
/	- . - . - .

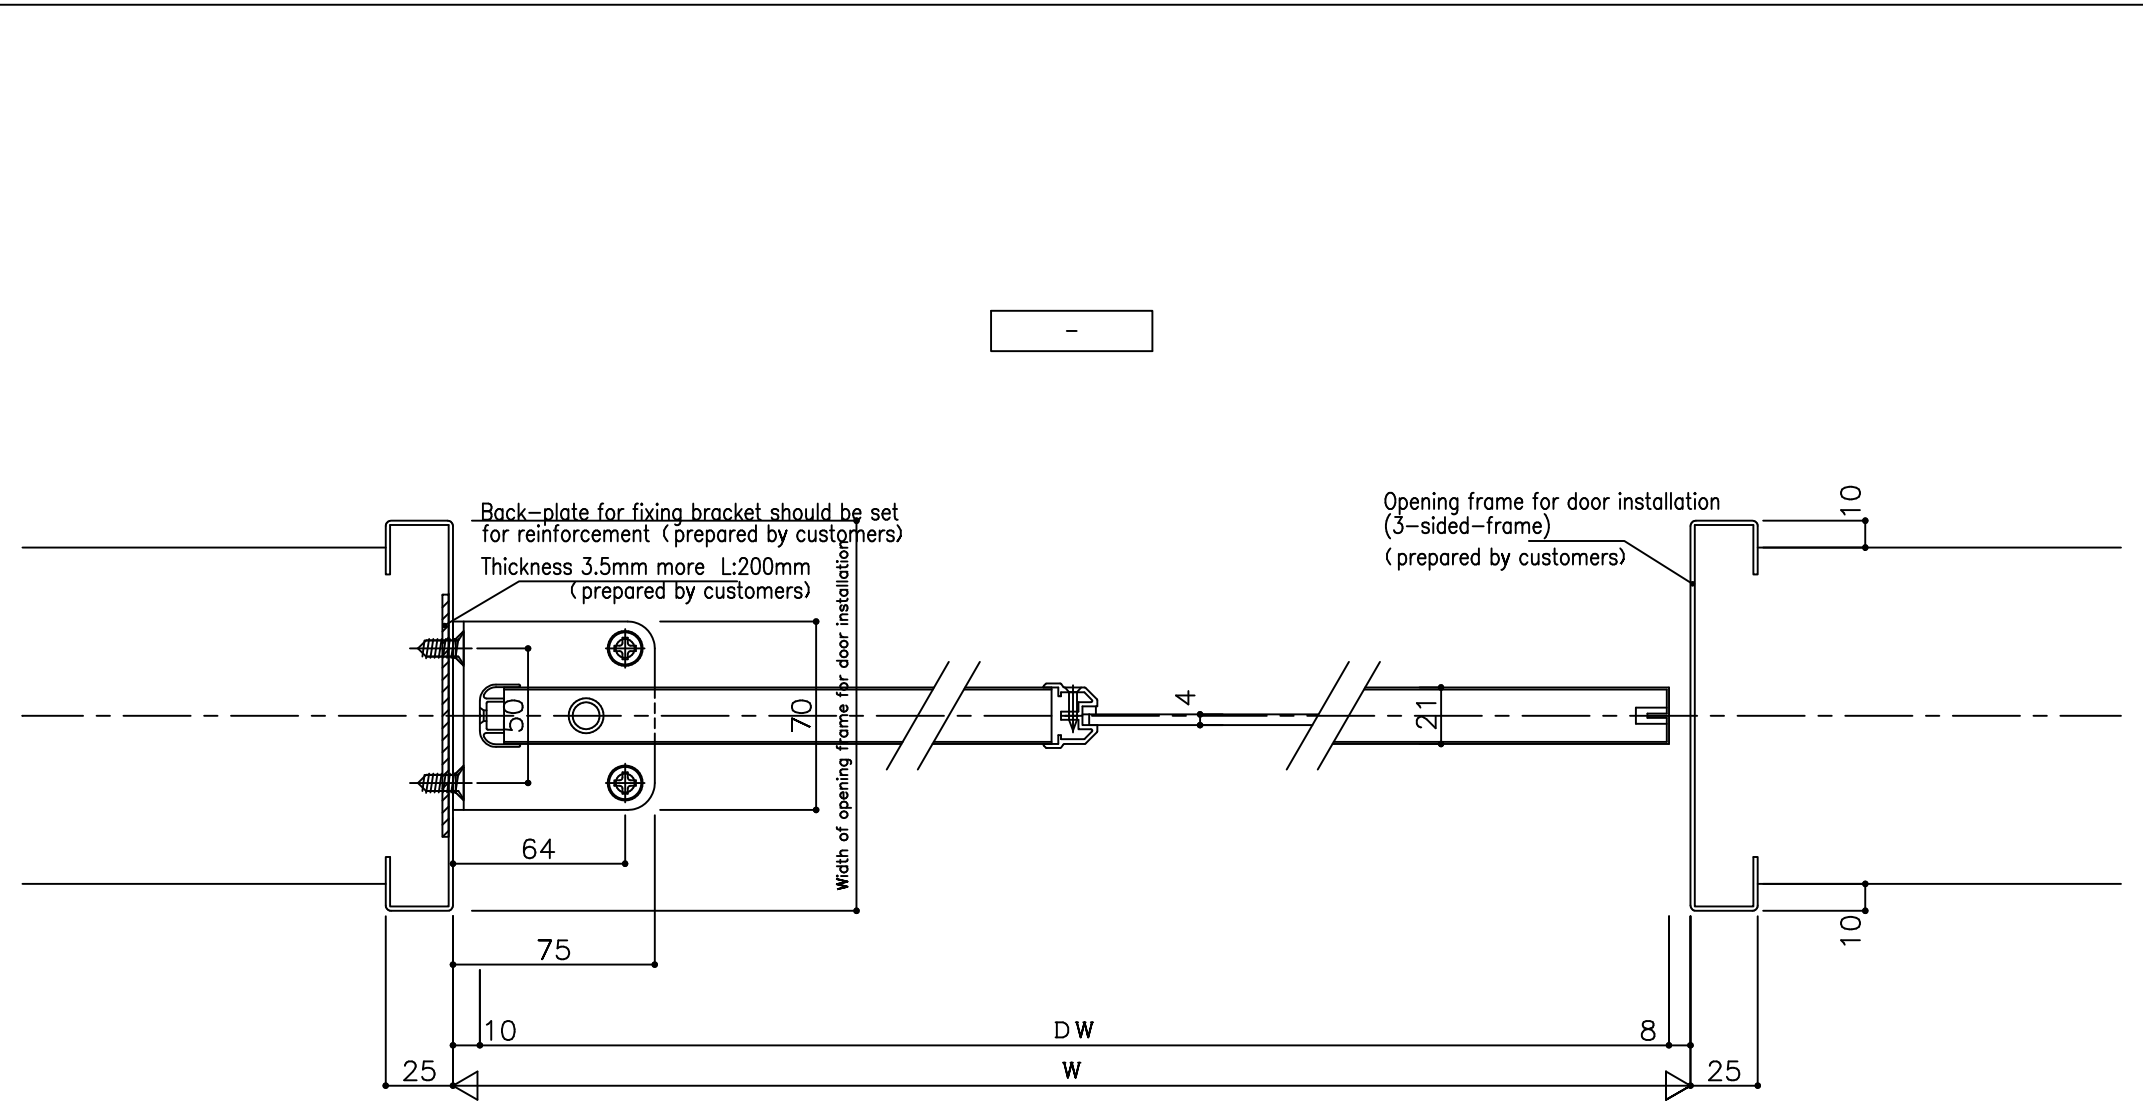


---	---
.	.
.	.
.	.
.	.

Drawing name
 UNIFLOW SWING DOOR
 SCP-5 (single door)
 cross section



Scale	-
1/2	Drawing No. -
/	Date - . - . - .

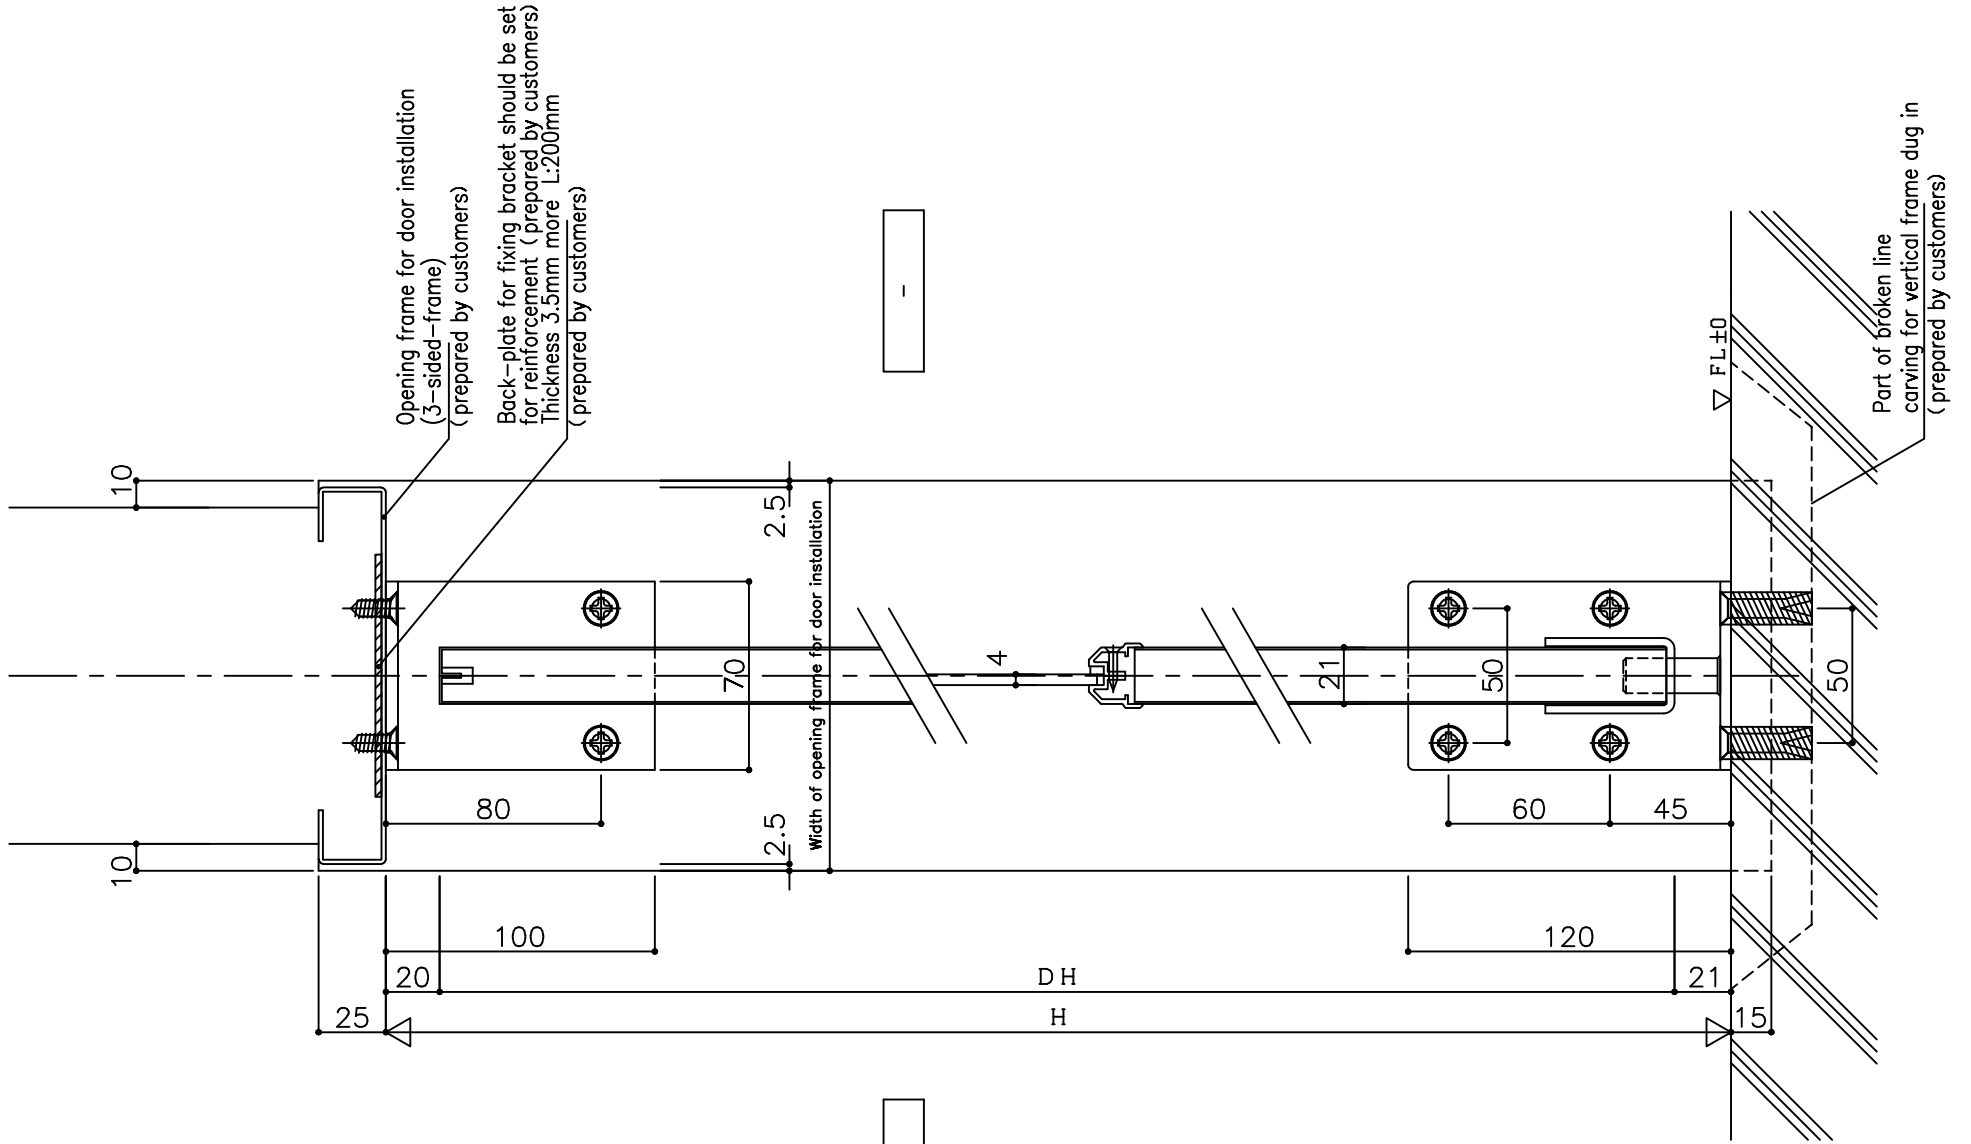

•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•

Drawing name
 UNIFLOW SWING DOOR
 SCP-5
 vertical section



Scale	1/2	-	-
Drawing No.	-	-	-
Date	-	-	-