Range of possible opening

W (Effective opening width)	6000 ~ 10000
H (Effective opening height)	2000 ~ 6000

※ The drum box is devided in quarters in case of the width is larger than 7435mm.
※ It devides the drum box into three in the event of either the width is smaller than 7435mm or equal to 7435mm.
※ In the case of the height is higher than 3000mm the rail is composed of 2 connected rails.
※ As in the case of either the height is lower than 3000mm or equal to 3000mm, 1 rail is supplied.
※ No back cover is attached the main box. (Inside of the box is exposed)
※ Note 1: In case that the back surface of the main box is facing to outward catching wind pressure, it requires wall material and so on to block it.
※ Note 2: The box cover of the main box is an option.
※ As in the case of the width is larger than 7435mm, 3 pcs of upper body fixing brackets are supplied.

Box component	Colored steel plate	Color: Ivory
Sheet	Polyester yarn encapsulated vinyl sheet	Color: Transparent/ Insect-proof orange

Contents		Number		
		Rear side	Back side	Sum
Safety sensor	Through-beam sensor	1	1	2
Startup sensor	(Optional)	–	–	–
Opening/closing switch	Single push button (Optional)	–	–	–
Motor	Output 1.5KW	–	–	–
Control box	Three phase AC200V 7A or less	1	–	1

Code	Quantity	Location of installation
–	–	~
Type	UNIFLOW Smoother Model: RX-4	

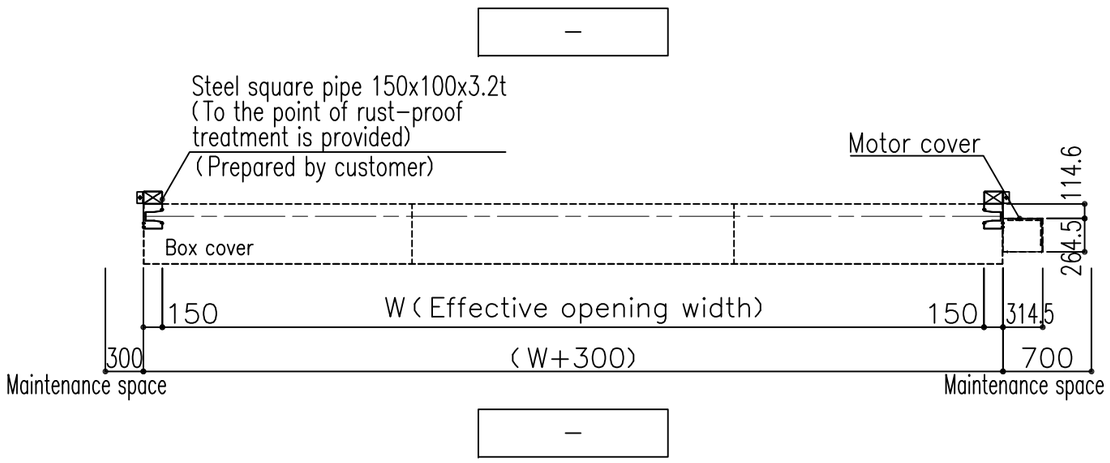

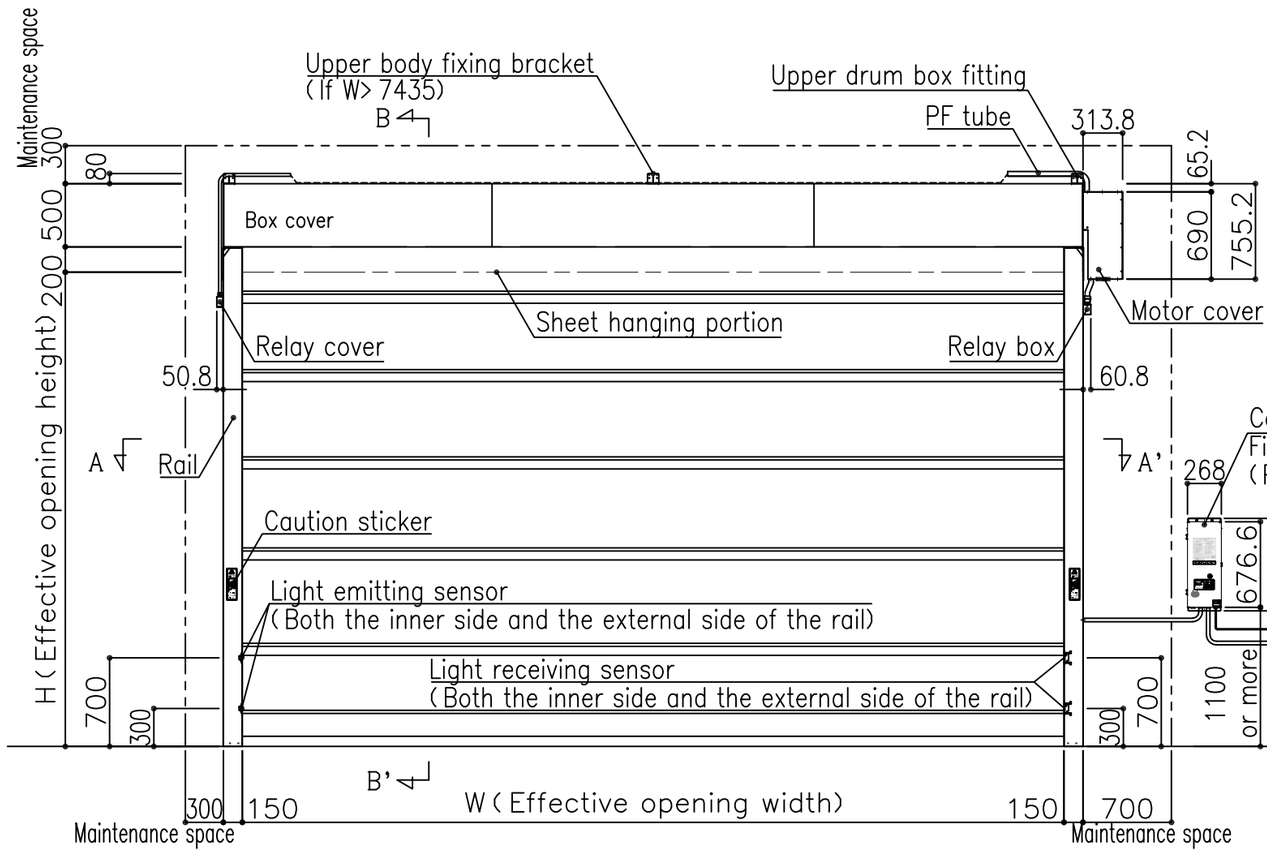

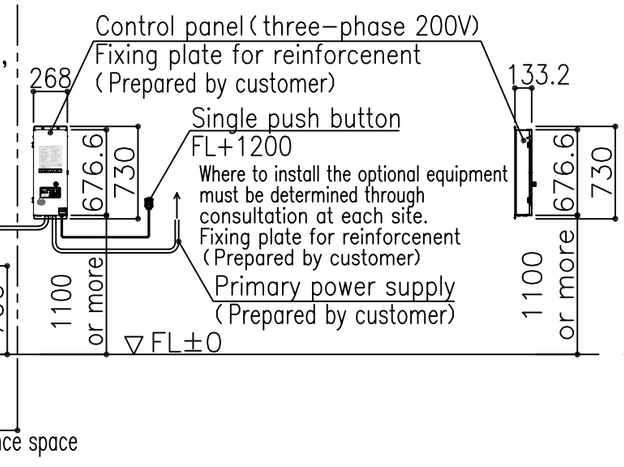

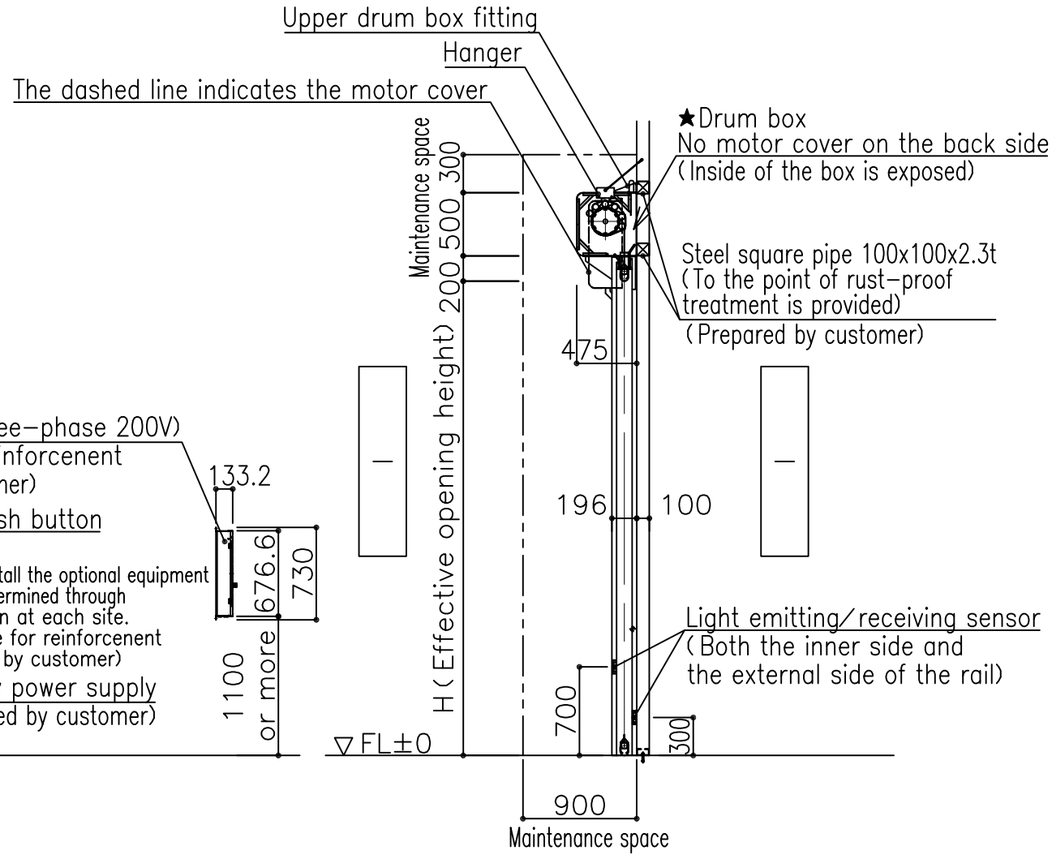

※Where to install the conrol panel or optional equipment must be determined through consultation at each site.
※A preliminary discussion at each site regarding the type and the installation position of the start-up sensor is required.
※Treatment of the installation base must be determined through consultation at each site.

Line / Ht	–	Project Title: –	Drawing Name: High-speed Roll-up Door Smoother RX-4	UNIFLOW	Sale by: –	Checked by: –	Drawn by: –	Scale: 1/50	Reference No GS2507211 Drawing No. 01 Date 25 ◦ 07 ◦ 18

–

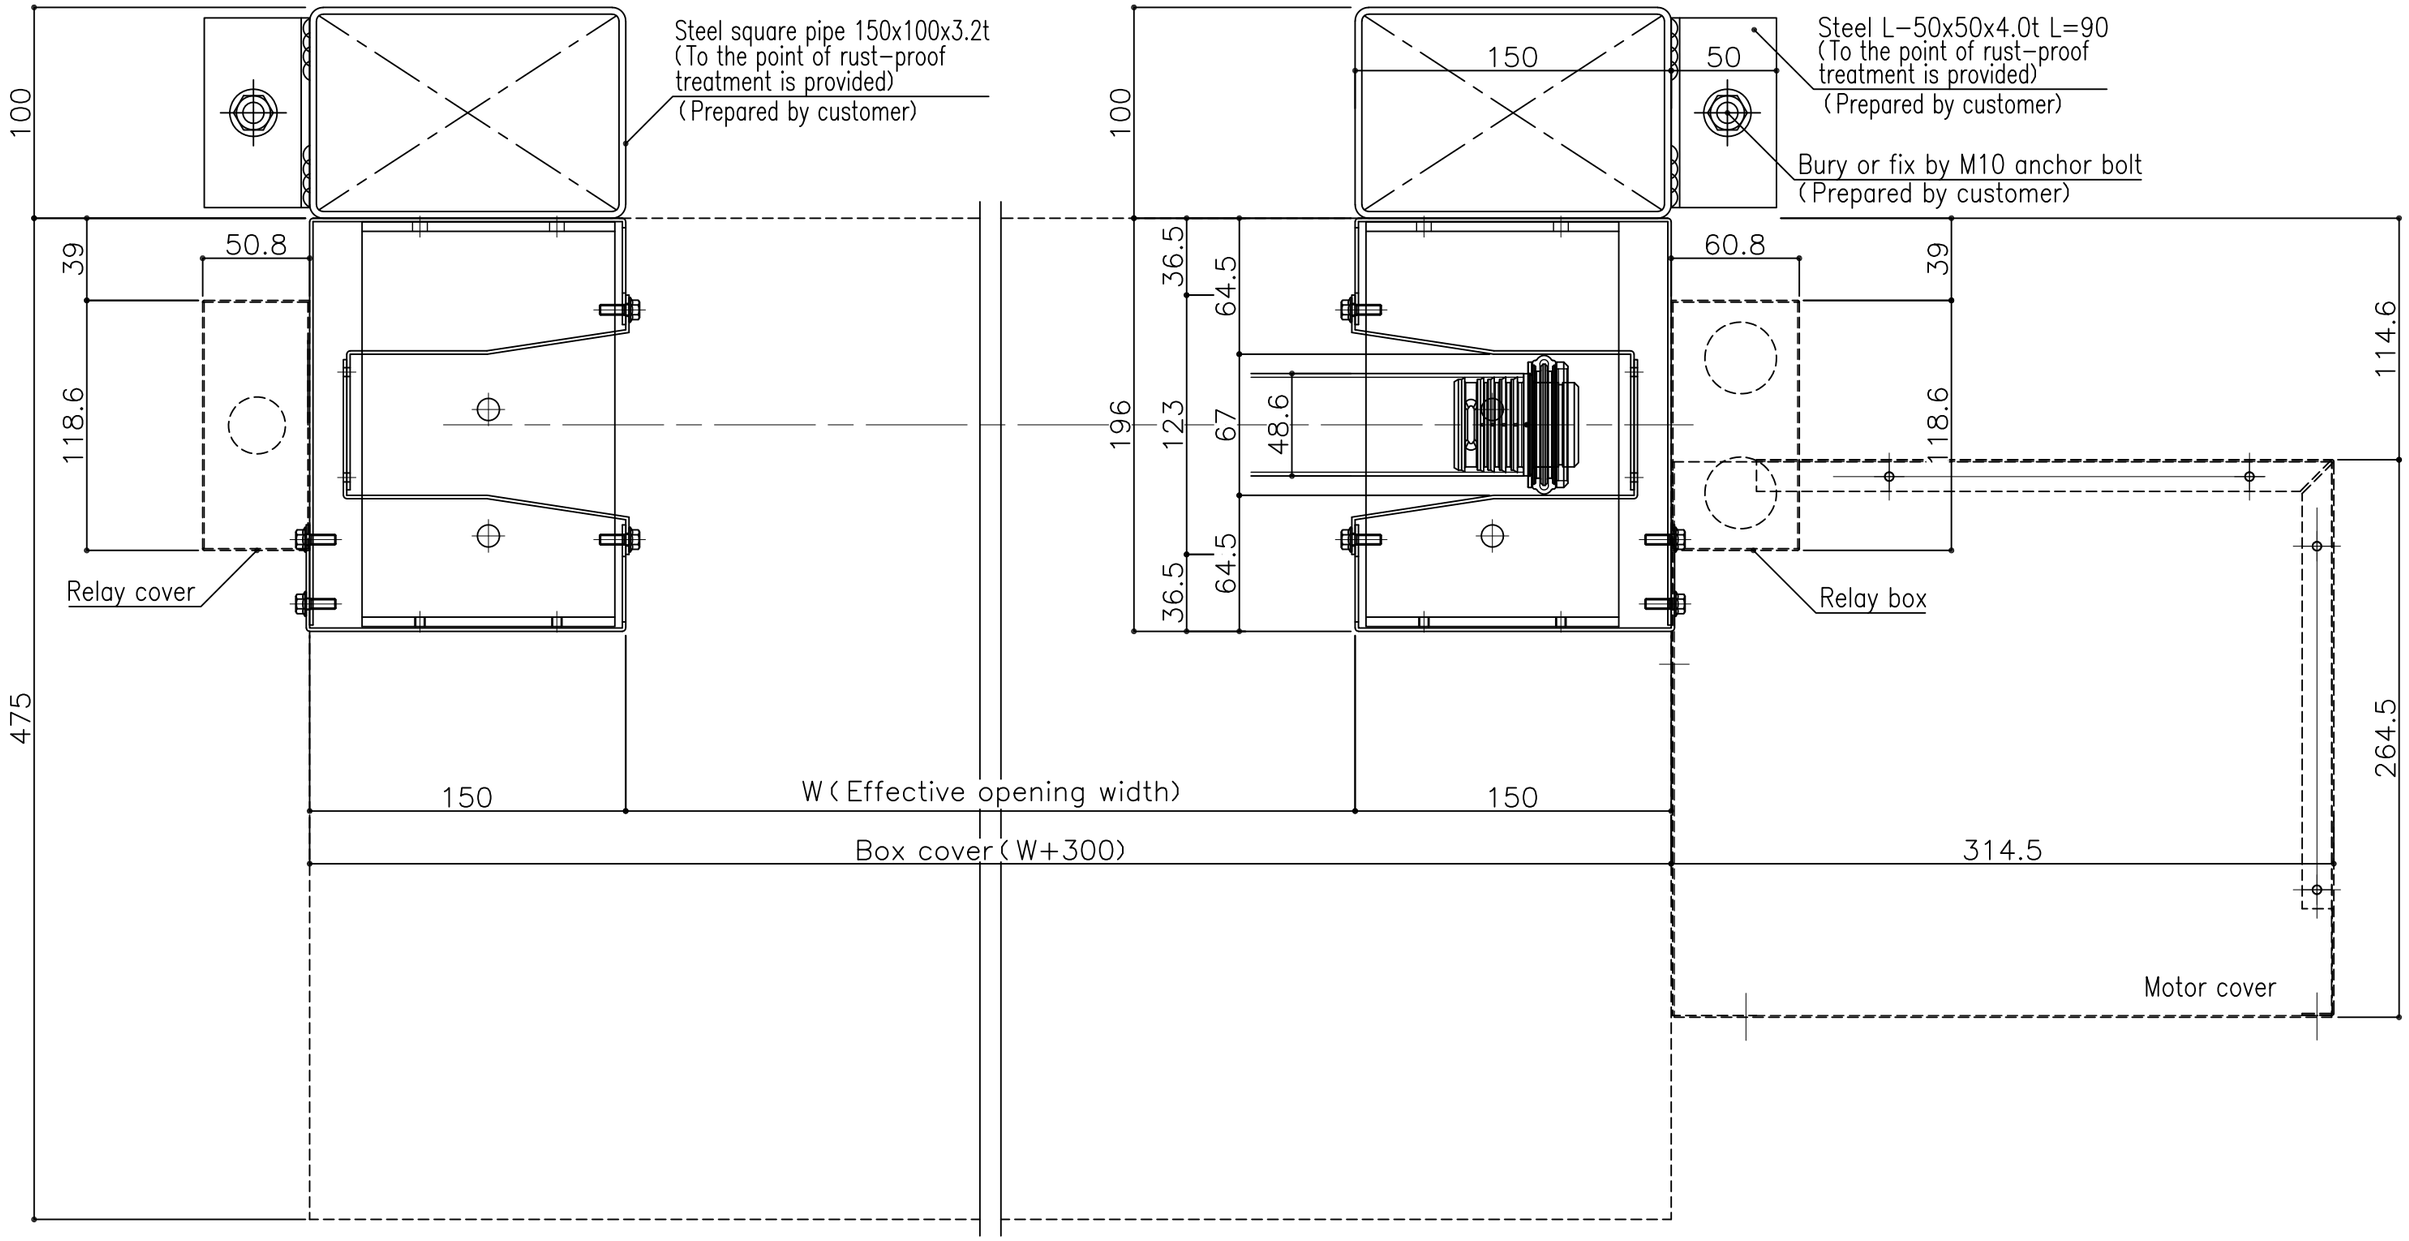

–

A – A' Section

Line / Point	– ∘ – ∘ –	–	Project Title	Drawing Name	UNIFLOW	Sale by	Checked by	Drawn by	Scale
	∘ ∘			High-speed Roll-up Door					1/3
	∘ ∘		–	Smoother RX-4 Cross section		–	–	–	
	∘ ∘								
	∘ ∘								

Reference No	GS2507211
Drawing No.	02
Date	25 ∘ 07 ∘ 18

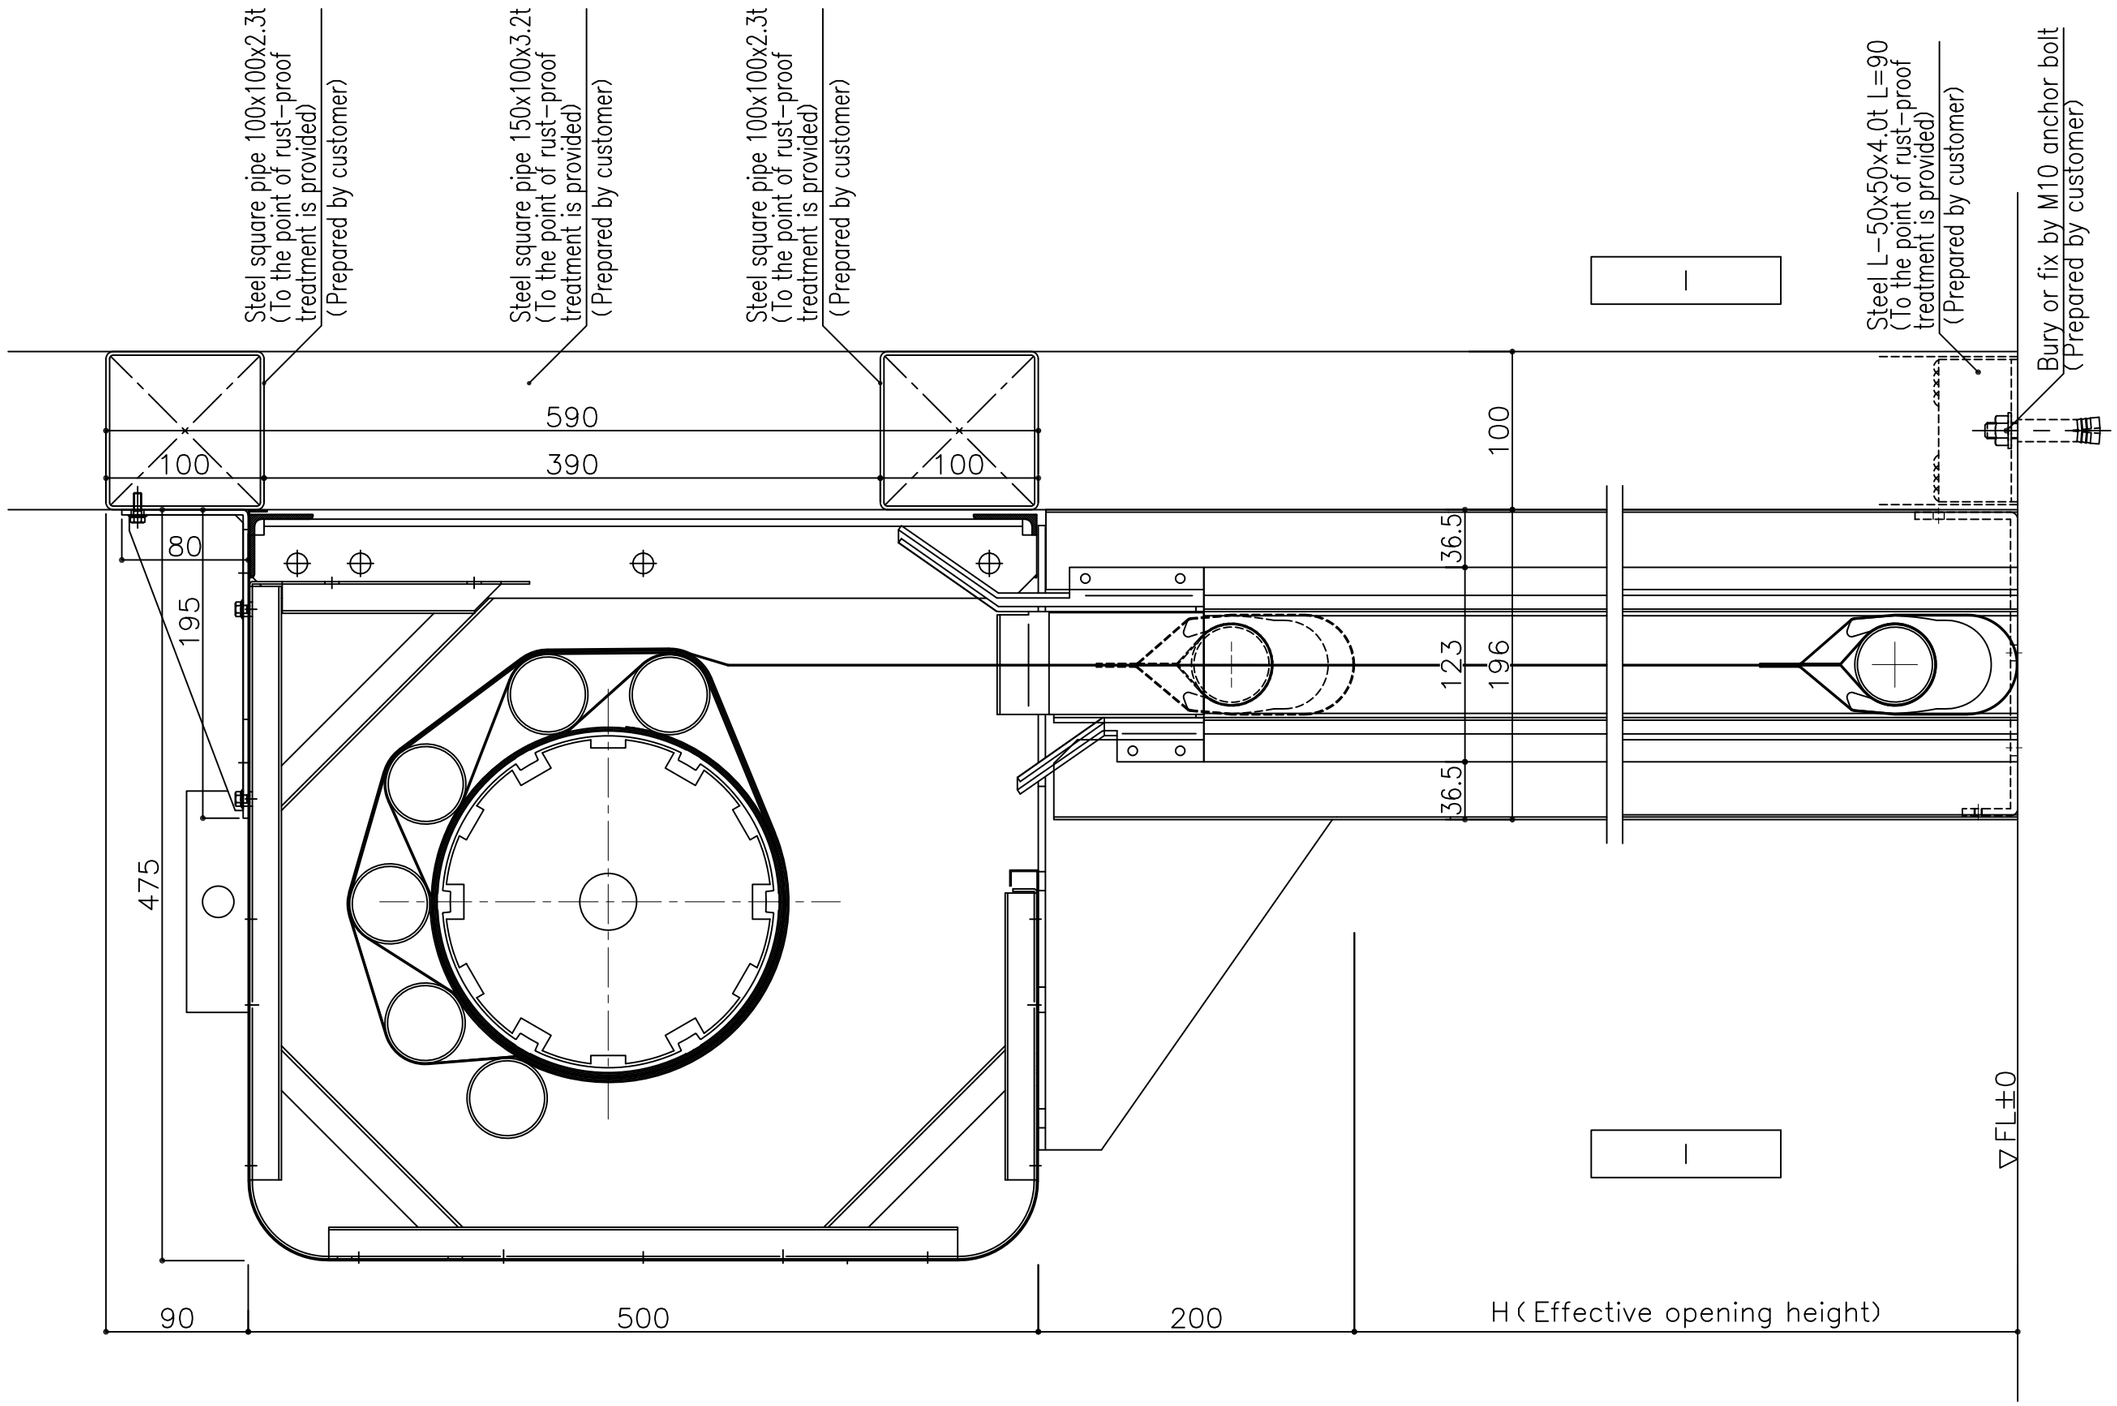

B-B' Section

Line / Ht	–	Project Title: –	Drawing Name: High-speed Roll-up Door Smoother RX-4 Vertical section	UNIFLOW	Sale by: –	Checked by: –	Drawn by: –	Scale: 1/4	Reference No GS2507211 Drawing No. 03 Date 25 • 07 • 18

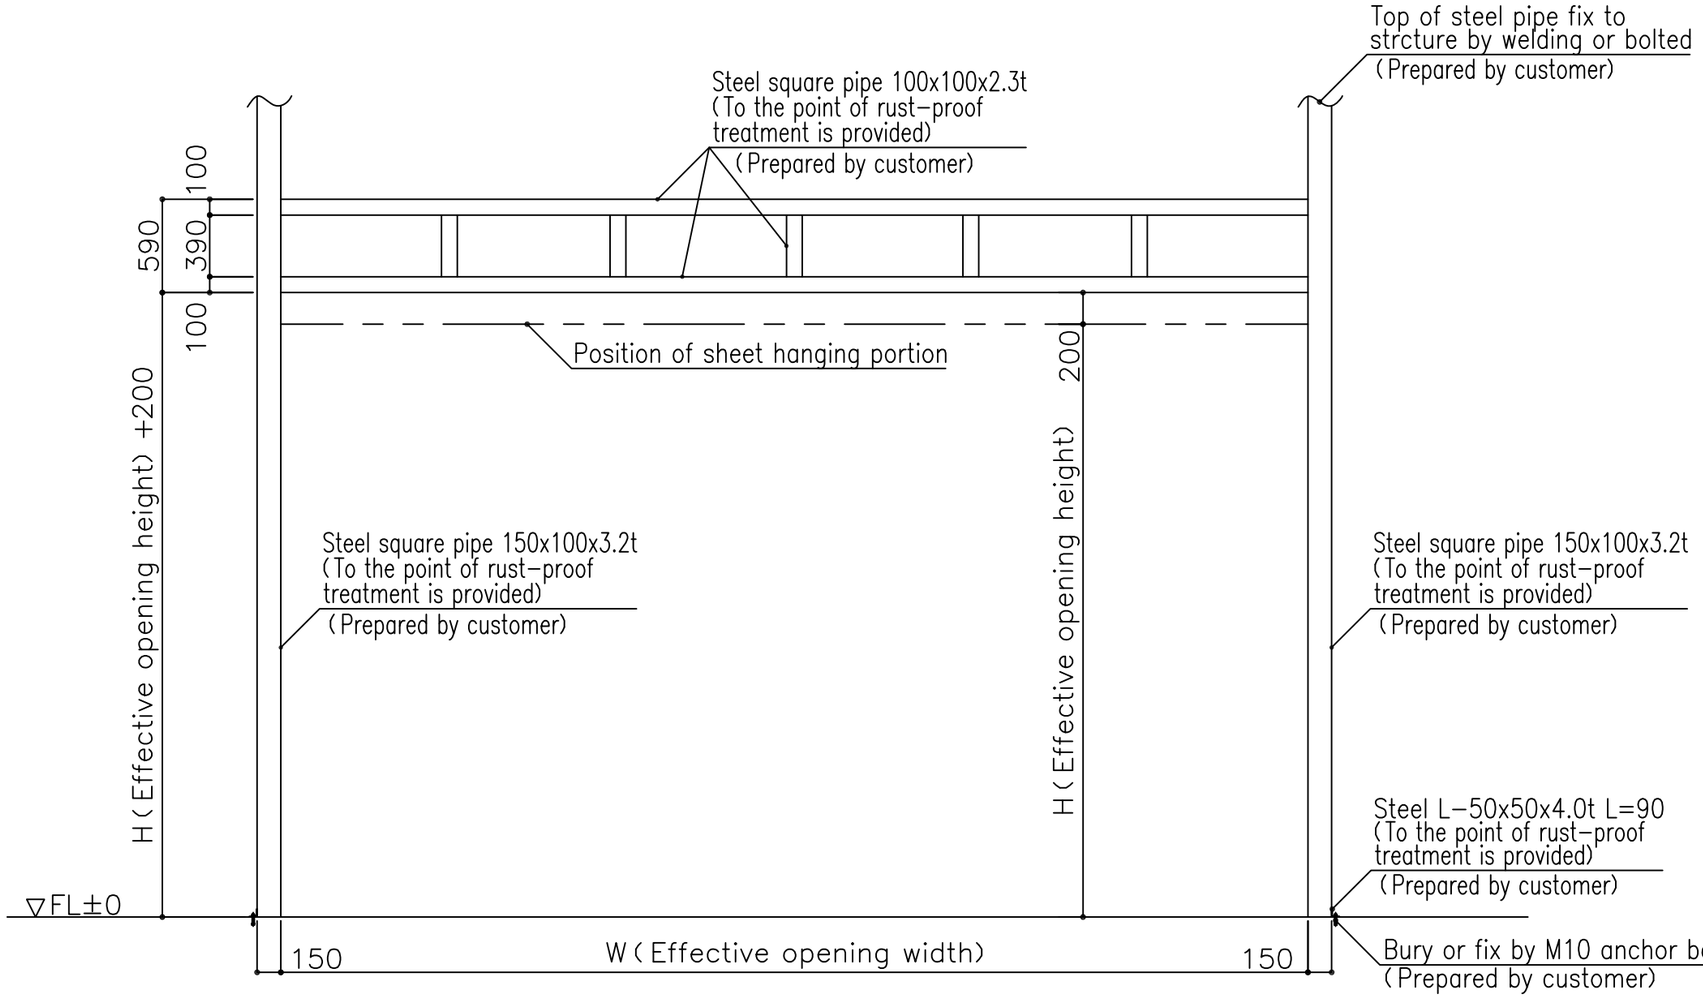

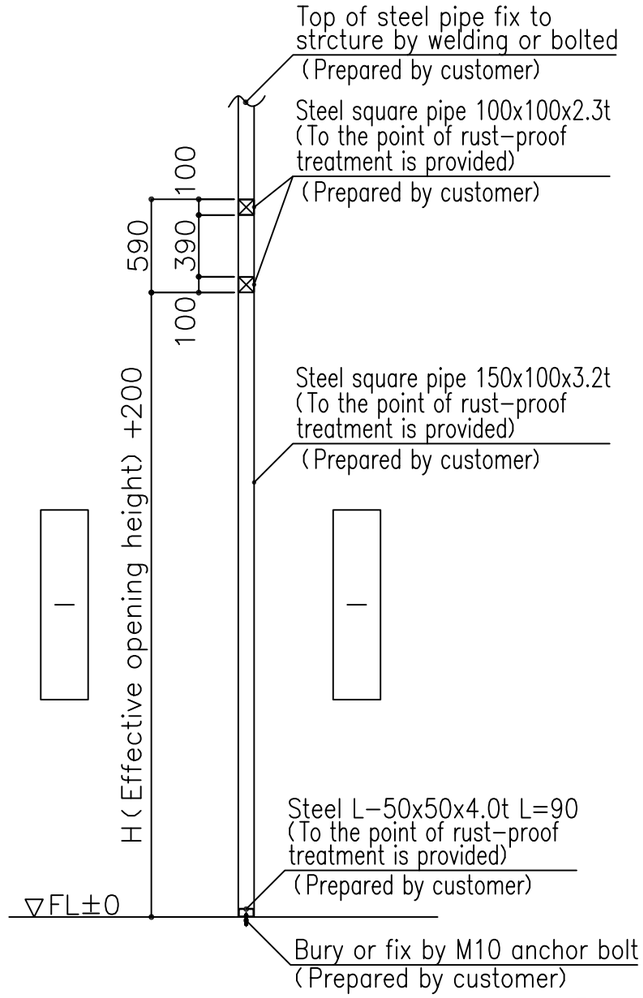

※Treatment of the installation base must be determined through consultation at each site.

※L-shaped component (St: L-50x50x4.0 L=90) for steel frame connection is prepared by customer

山	–	Project Title	Drawing Name	UNIFLOW	Sale by	Checked by	Drawn by	Scale
川		–	High-speed Roll-up Door Smoother RX-4 Bases of installation		–	–	–	1/40

Reference No GS2507211
Drawing No. 04
Date 25 ◦ 07 ◦ 18