

No.	Name	Material	Remark
1	Surface material	Stainless steel	thickness 0.8 mm
2	Window	Acrylic resin	color: transparent/thickness 4.0 mm
3	Window frame	Aluminum	color: alumite silver
4	Screw	Stainless steel	+A truss tapping/5x18
5	Hinge cover	ABS resin	130 mm x 97 mm x 25.7 mm
6	Hinge cover screw	Stainless steel	+roundhead in light grey/M4x8
7	Upper bracket in frame side	Steel SPC	Unichrome plating
8	Screw for bracket in frame side	Stainless steel	+flathead/M6 x 15
9	Lower bracket in frame side	Stainless steel	-
10	Screw for lower bracket in frame side	Stainless steel, PVC	+A flathead tapping6 x30, with PYplug8 x32
11	C-channel	Aluminum	NA-channel P, color: alumite silver
12	Opening frame for door installation (3-sided-frame)	-	Prepared by customers

Core of door • lumber core  
Opening frame for door installation (3-sided-frame) and back plate for reinforcement should be prepared by customer.

Possible dimensions for production

	Single door	Double door
Opening width (W)	415 ≤ W ≤ 1200	830 ≤ W ≤ 2400
Opening height (H)	800 ≤ H ≤ 2400	

\* Windows cannot generally be installed in the door with DW < 400 OR DH < 900.

Window size

Door width (DW)	Window width	Window height
555 ≤ DW	355	420
400 ≤ DW < 555	200	420
DW < 400	No window	


\*Window sizes other than the above can be used depending on the height (H) and position of the window (to be confirmed)  
\* Minimum opening for window: w200 h250  
\* Vertical position of window: requires minimum 500 from door panel bottom edge and minimum 200 from door panel upper edge.

Code	How many	Where to install
①	-	~
Type	SWING DOOR SCP-3 (double door)	

Drawing name  
UNIFLOW SWING DOOR  
SCP-3 (double door)  
Image of basic installation




Scale  
1/20  
Drawing No. -  
Date - . - . -

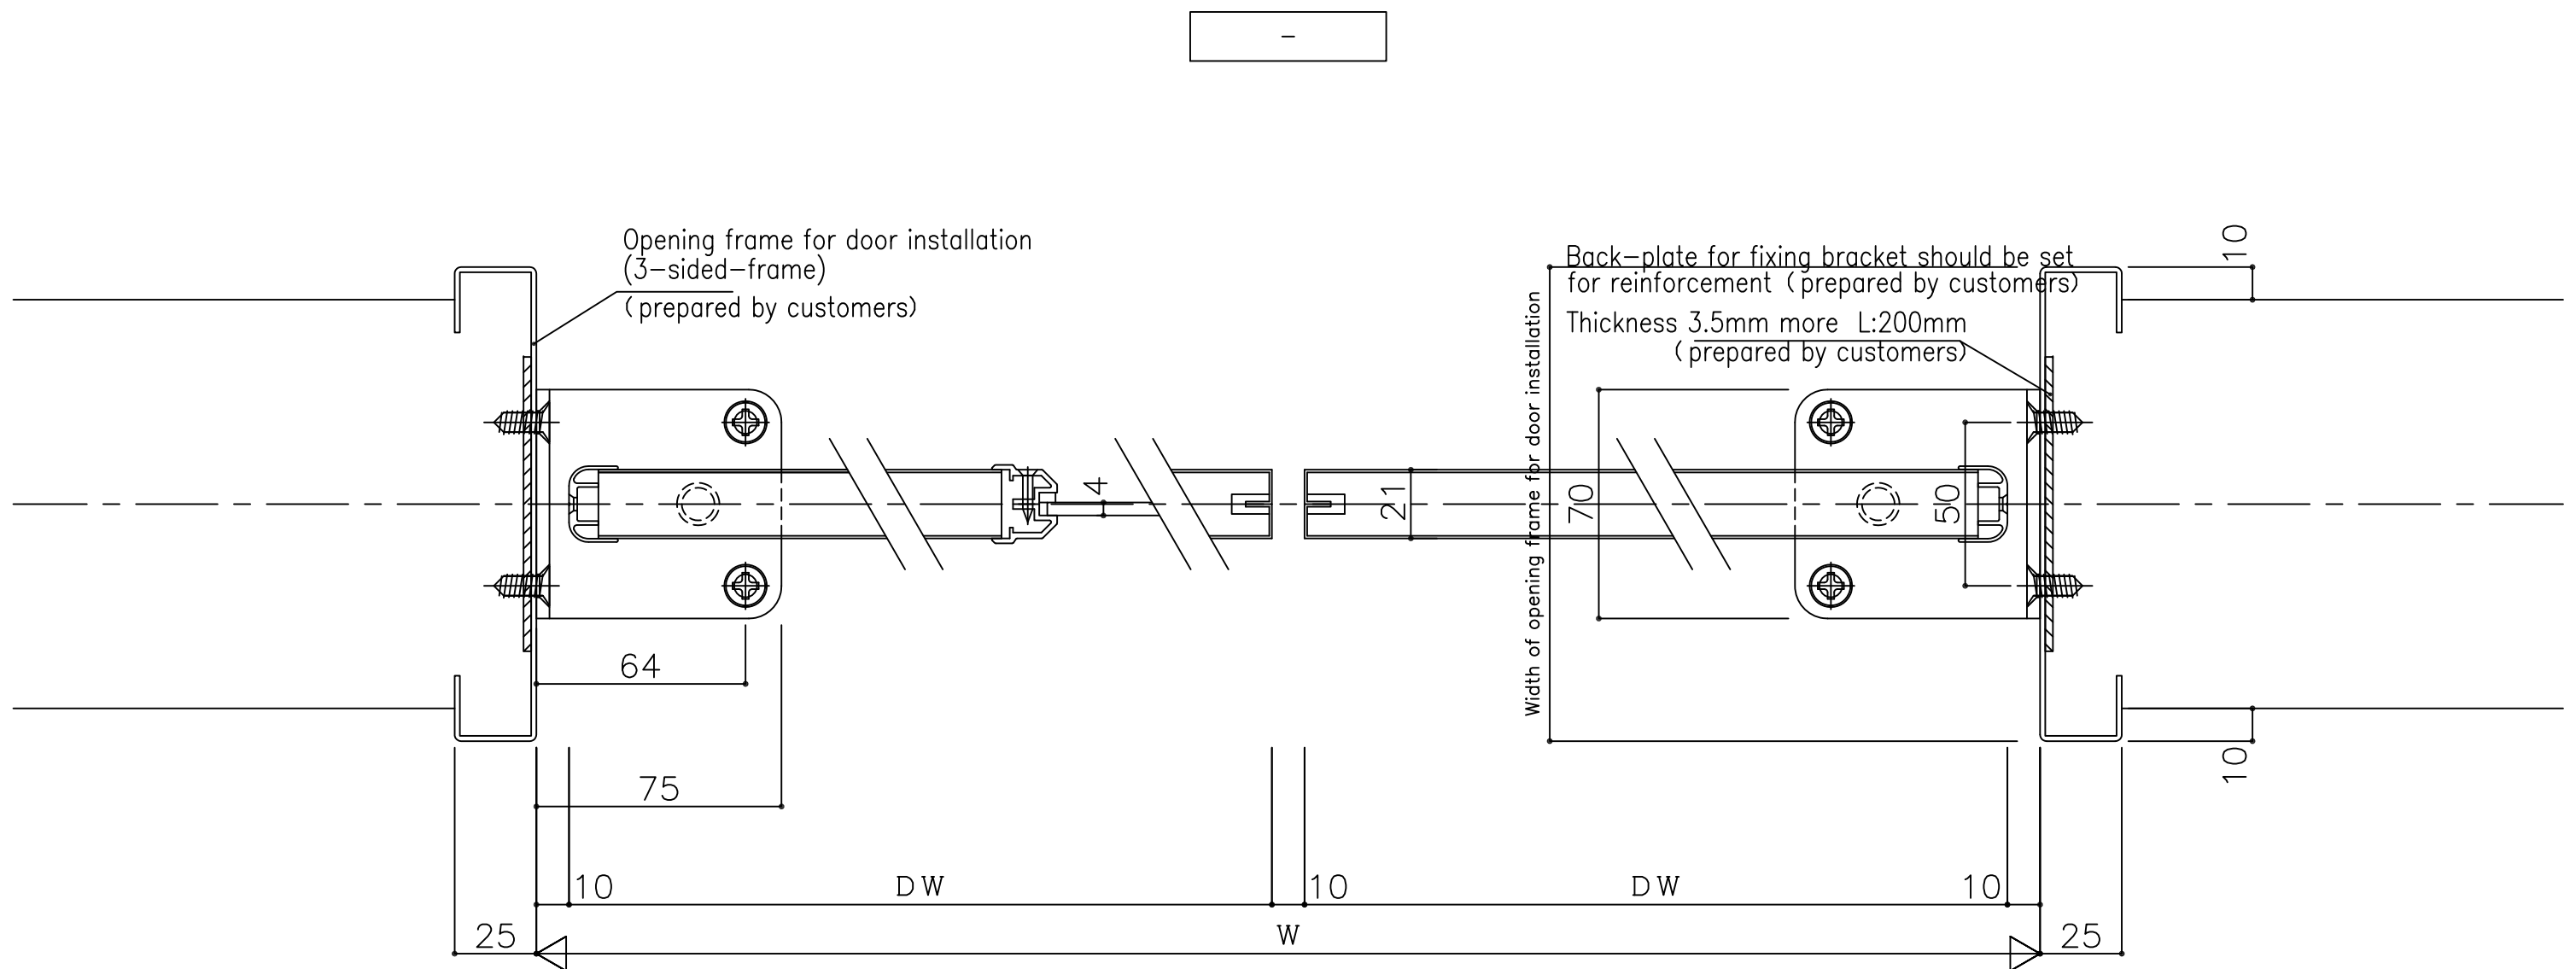


-

-




-	-		Drawing name UNIFLOW SWING DOOR SCP-3 (double door) cross section	<b>#式設計 UNIFLOW</b>	-	-	Scale 1/2	-
-	-						Drawing No.	-
-	-						Date	- . - . -

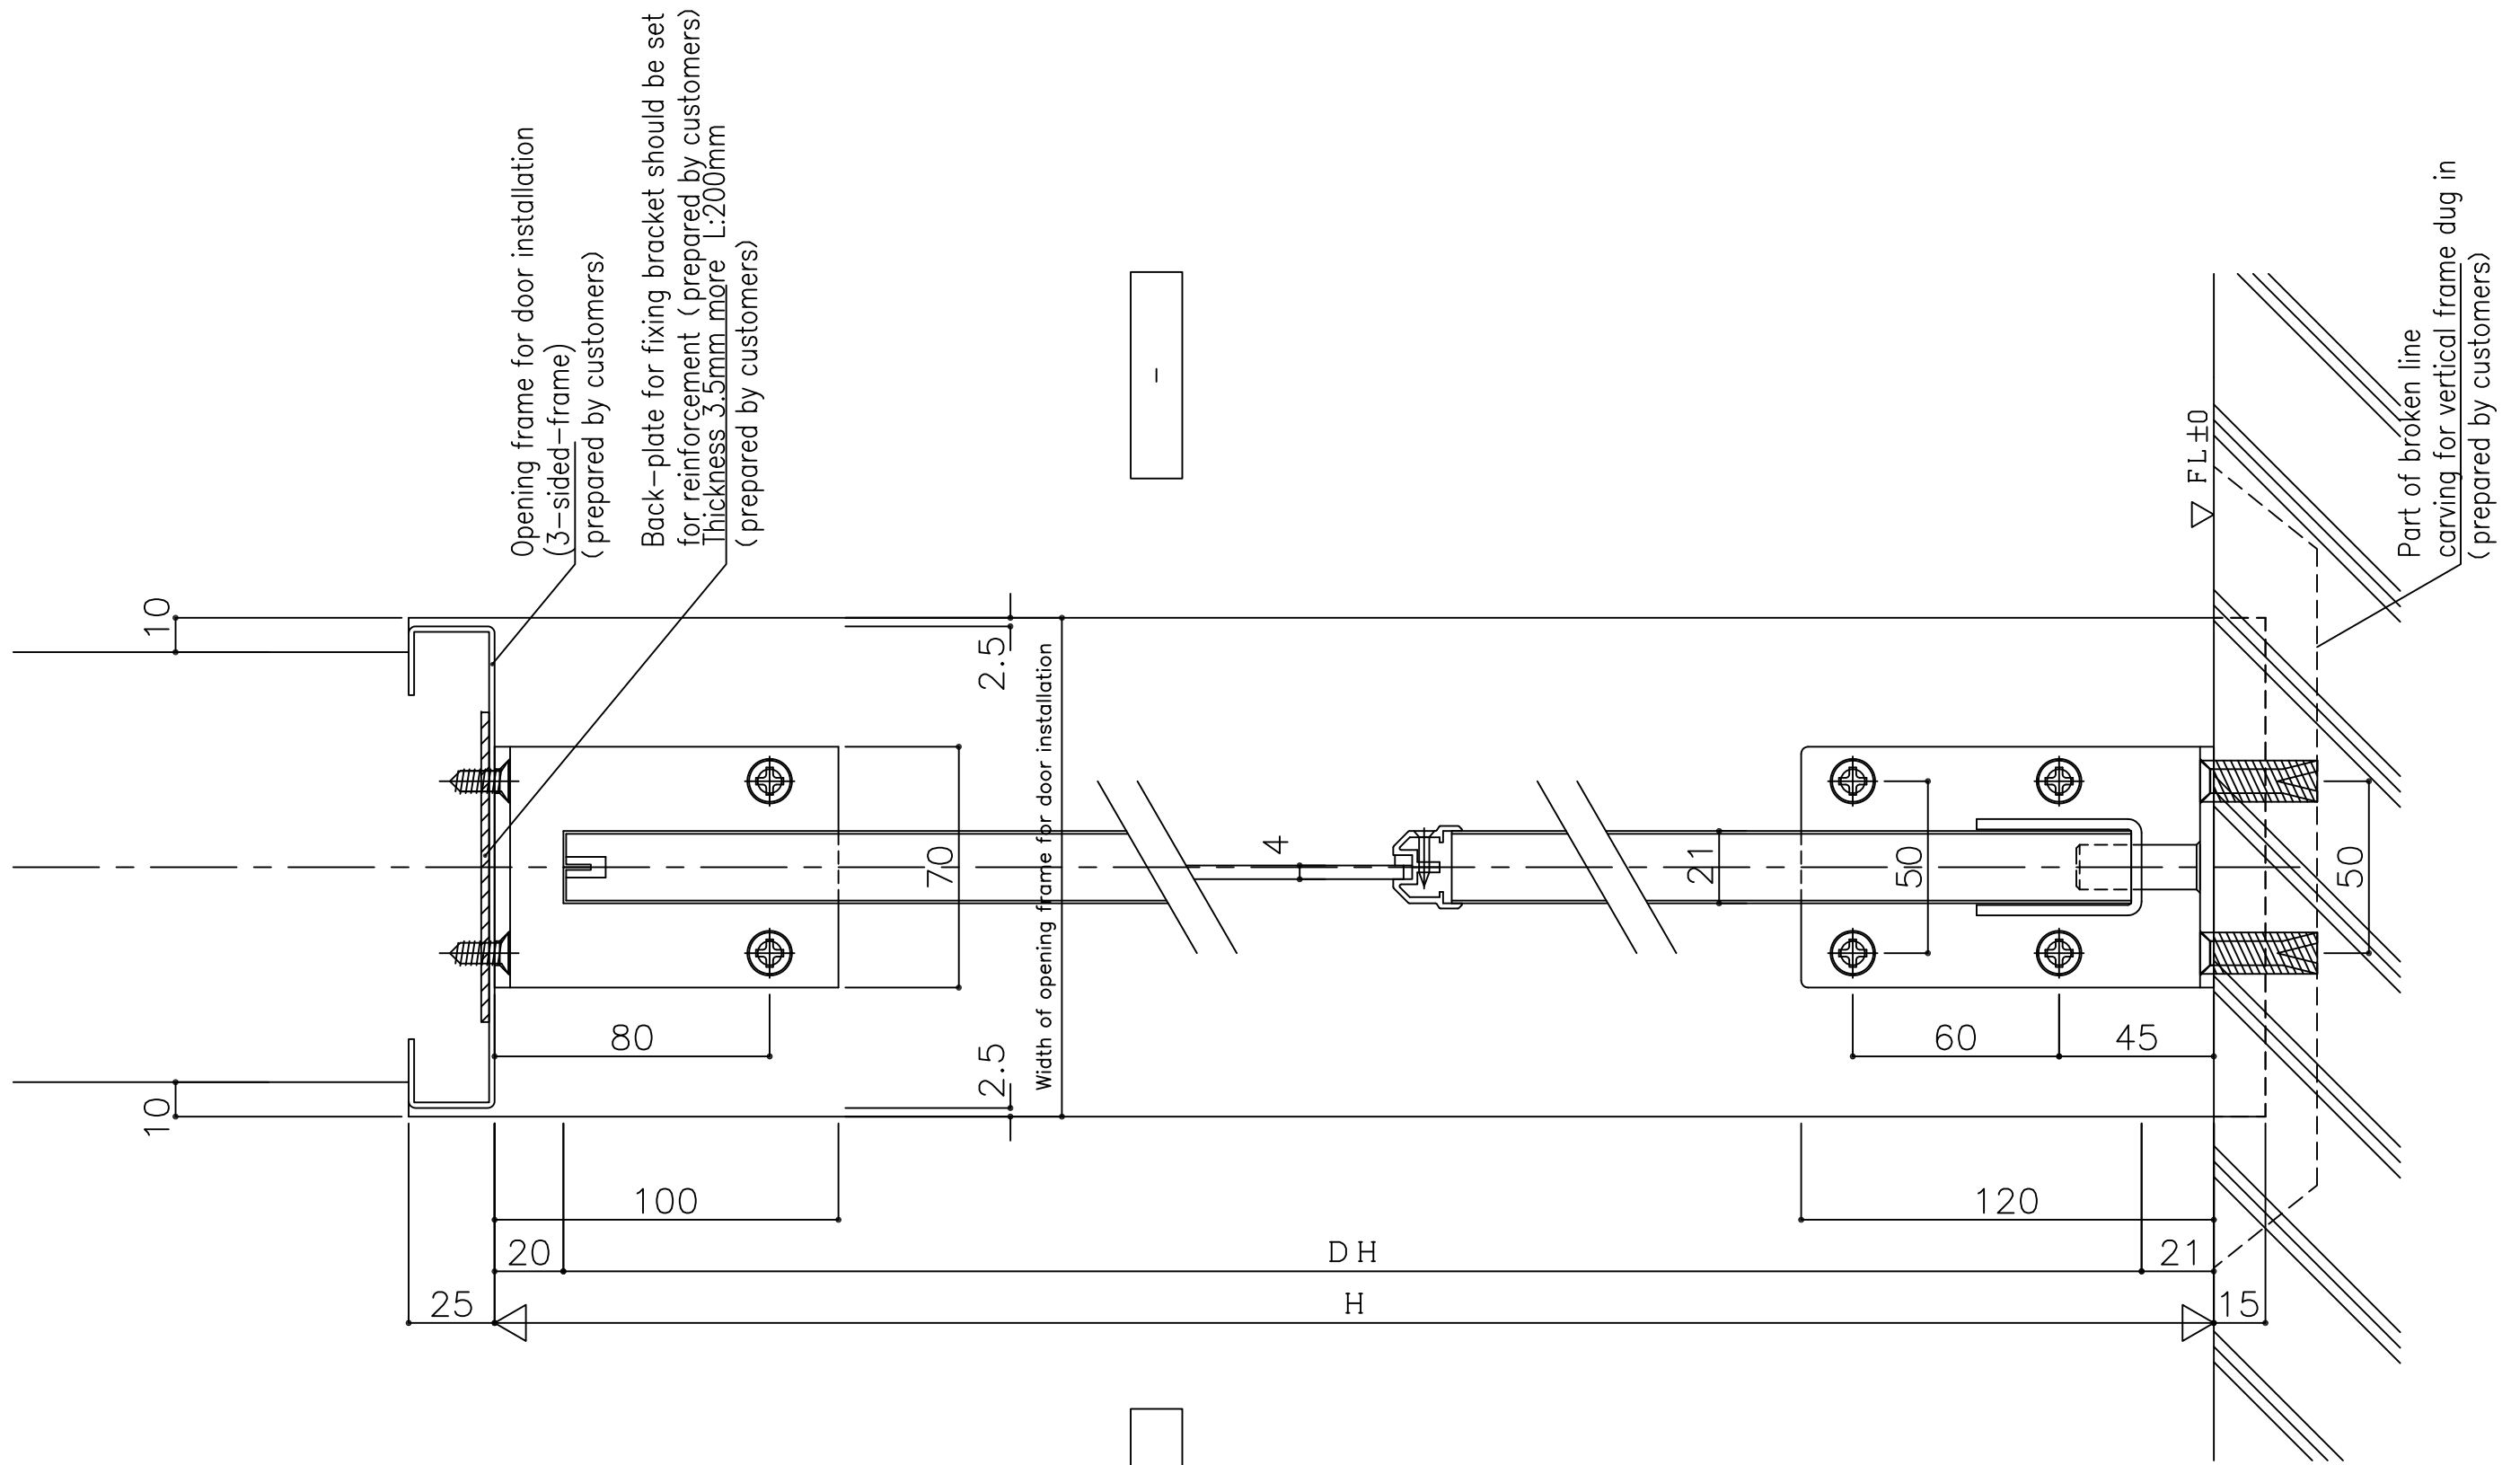

-

-





-	o	o	o	-
o	o	o	o	-
o	o	o	o	-
o	o	o	o	-

Drawing name  
UNIFLOW SWING DOOR  
SCP-3  
vertical section



Scale	1/2	-
Drawing No.	-	-
Date	-	-

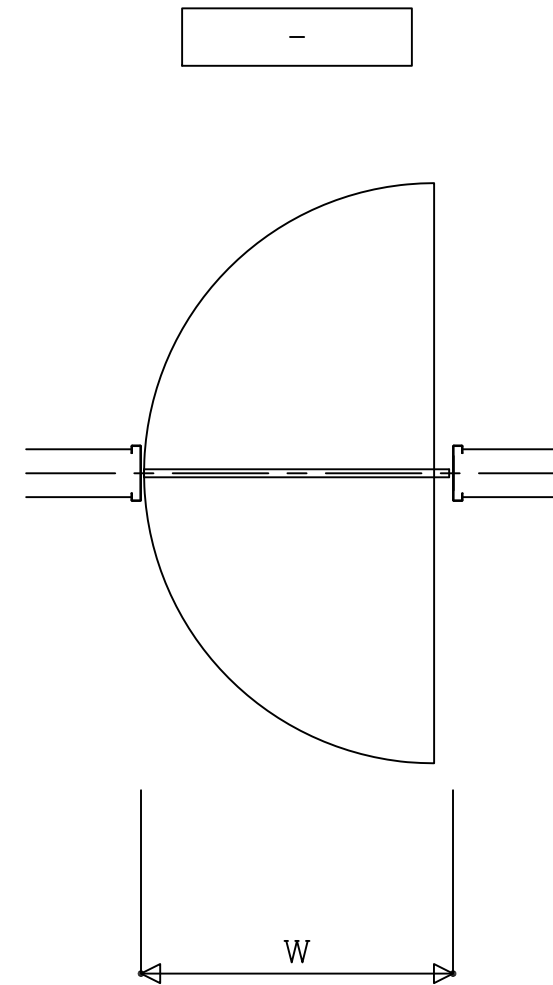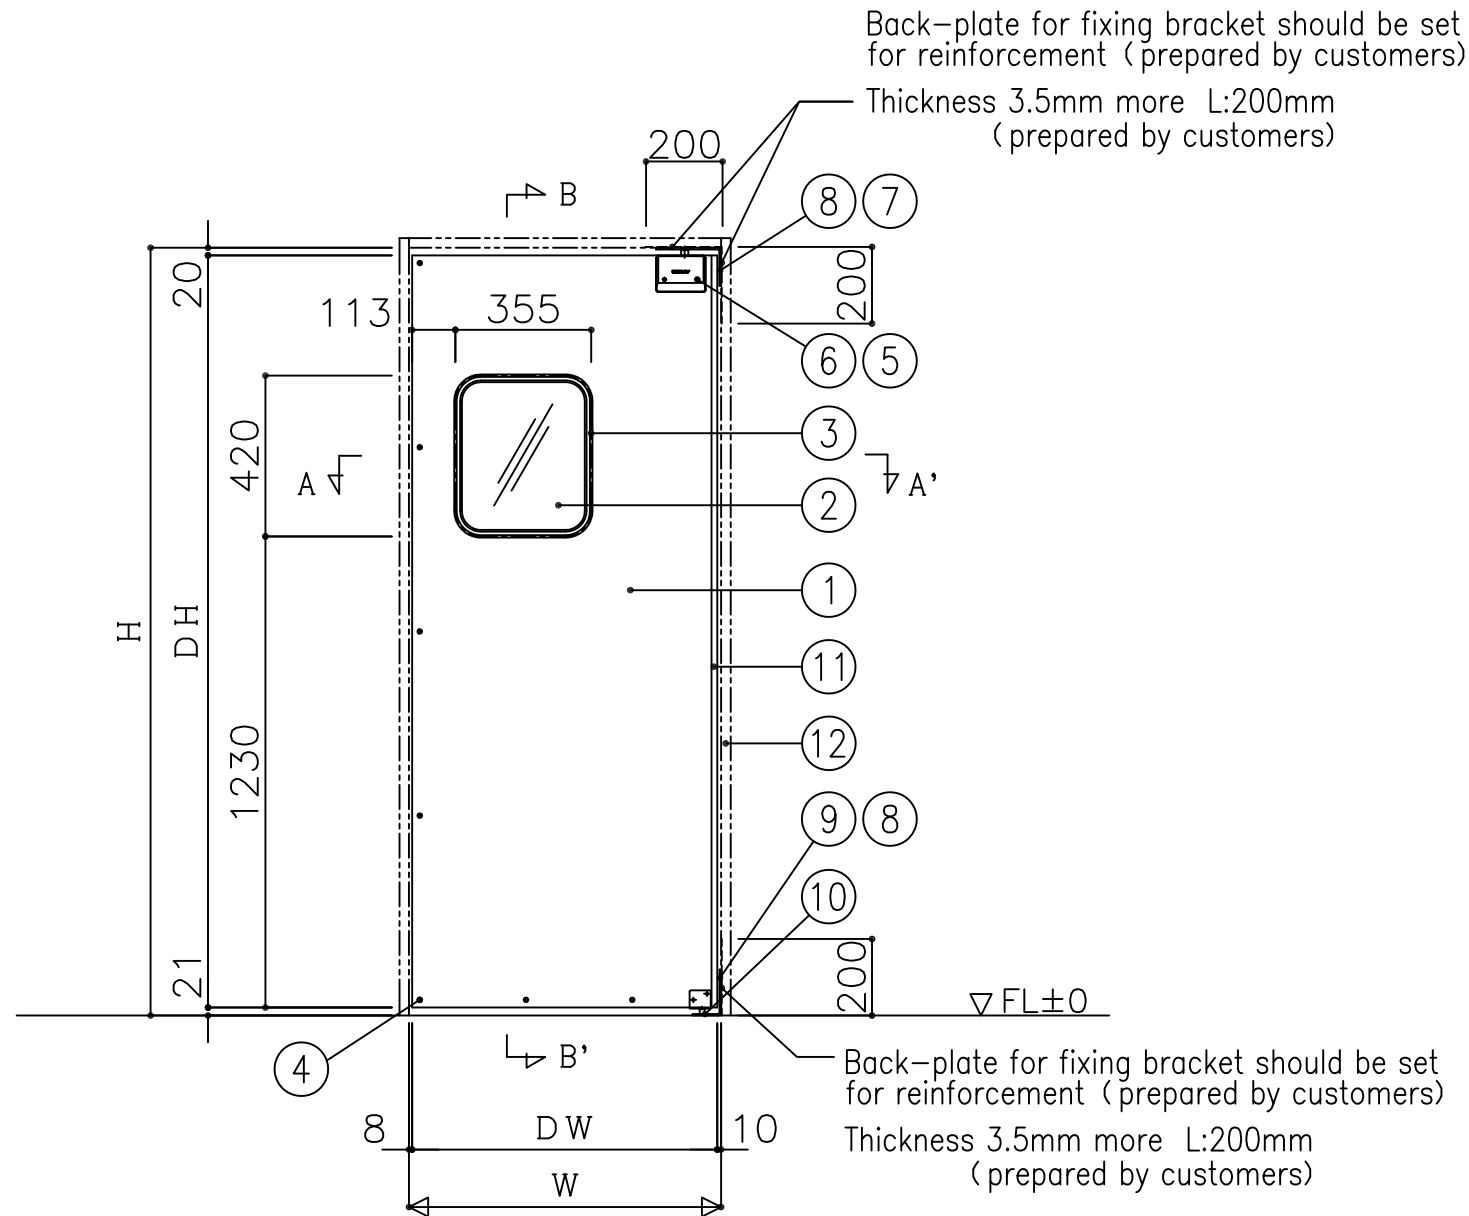

No.	Name	Material	Remark
1	Surface material	Stainless steel	thickness 0.8 mm
2	Window	Acrylic resin	color: transparent/thickness 4.0 mm
3	Window frame	Aluminum	color: alumite silver
4	Screw	Stainless steel	+A truss tapping/5x18
5	Hinge cover	ABS resin	130 mm x 97 mm x 25.7 mm
6	Hinge cover screw	Stainless steel	+roundhead in light grey/M4x8
7	Upper bracket in frame side	Steel SPC	Unichrome plating
8	Screw for bracket in frame side	Stainless steel	+flathead/M6 x 15
9	Lower bracket in frame side	Stainless steel	-
10	Screw for lower bracket in frame side	Stainless steel, PVC	+A flathead tapping 6 x 30, with PYplug 8 x 32
11	C-channel	Aluminum	NA-channel P, color: alumite silver
12	Opening frame for door installation (3-sided-frame)	-	Prepared by customers

Core of door • • lumber core  
Opening frame for door installation (3-sided-frame) and back plate for reinforcement should be prepared by customer.

Possible dimensions for production

	Single door	Double door
Opening width (W)	415 ≤ W ≤ 1200	830 ≤ W ≤ 2400
Opening height (H)	800 ≤ H ≤ 2400	


\* Windows cannot generally be installed in the door with DW < 400 OR DH < 900.

Window size

Door width (DW)	Window width	Window height
555 ≤ DW	355	420
400 ≤ DW < 555	200	420
DW < 400	No window	

\* Window sizes other than the above can be used depending on the height (H) and position of the window (to be confirmed)  
\* Minimum opening for window: w200 h250  
\* Vertical position of window: requires minimum 500 from door panel bottom edge and minimum 200 from door panel upper edge.

Code	How many	Where to install
⊖ — ⊖	—	~
Type	SWING DOOR SCP-3 (single door)	

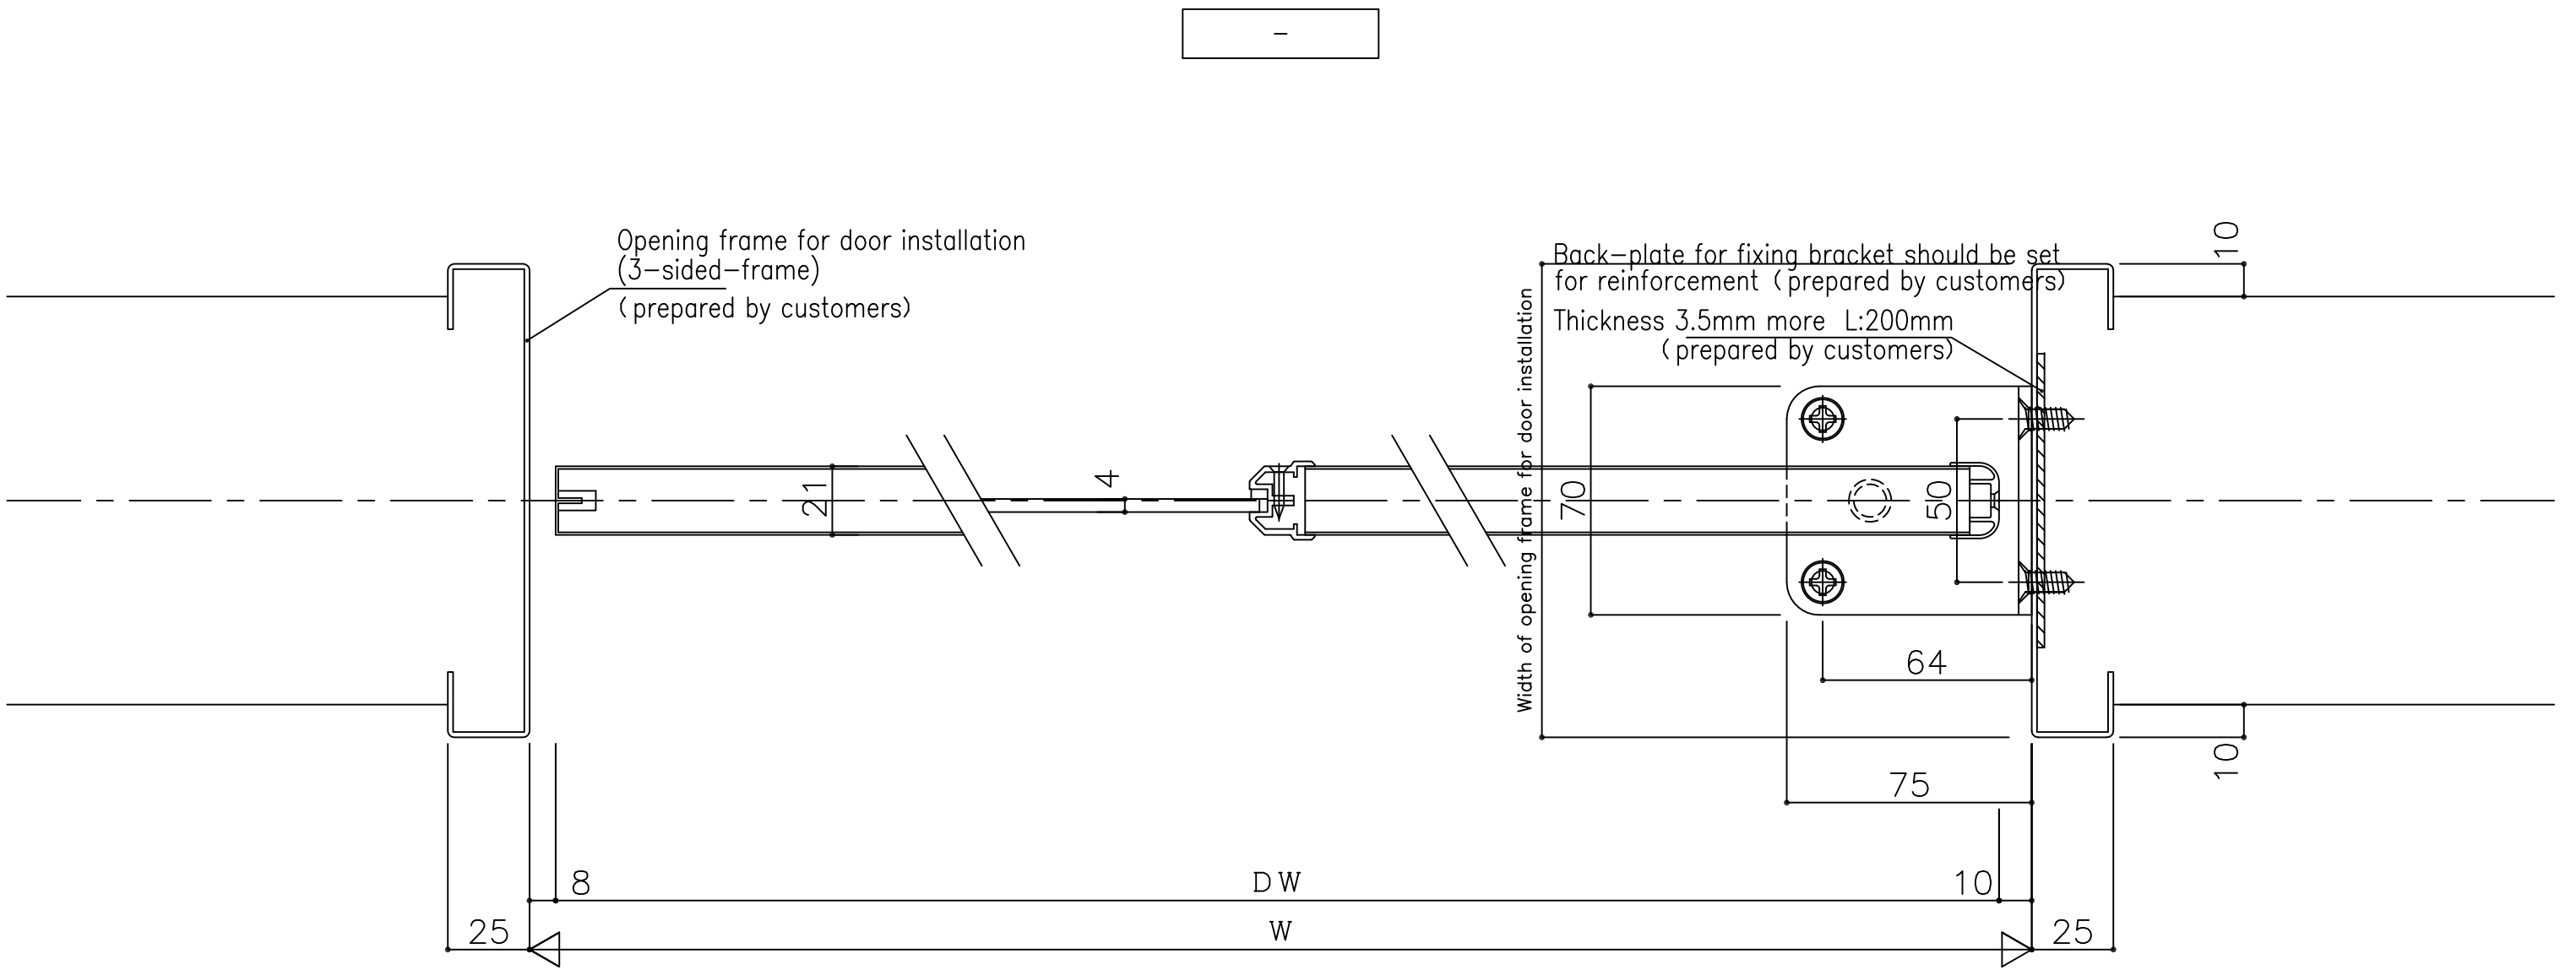

-

-


-

-	o	o	o	-
o	o	o	o	-
o	o	o	o	-
o	o	o	o	-
o	o	o	o	-

Drawing No.  
UNIFLOW SWING DOOR  
SCP-3 (single door)  
cross section


**株式会社ユニフロー**

Scale	-
1/2	Drawing No. -
/	Date - o - o -

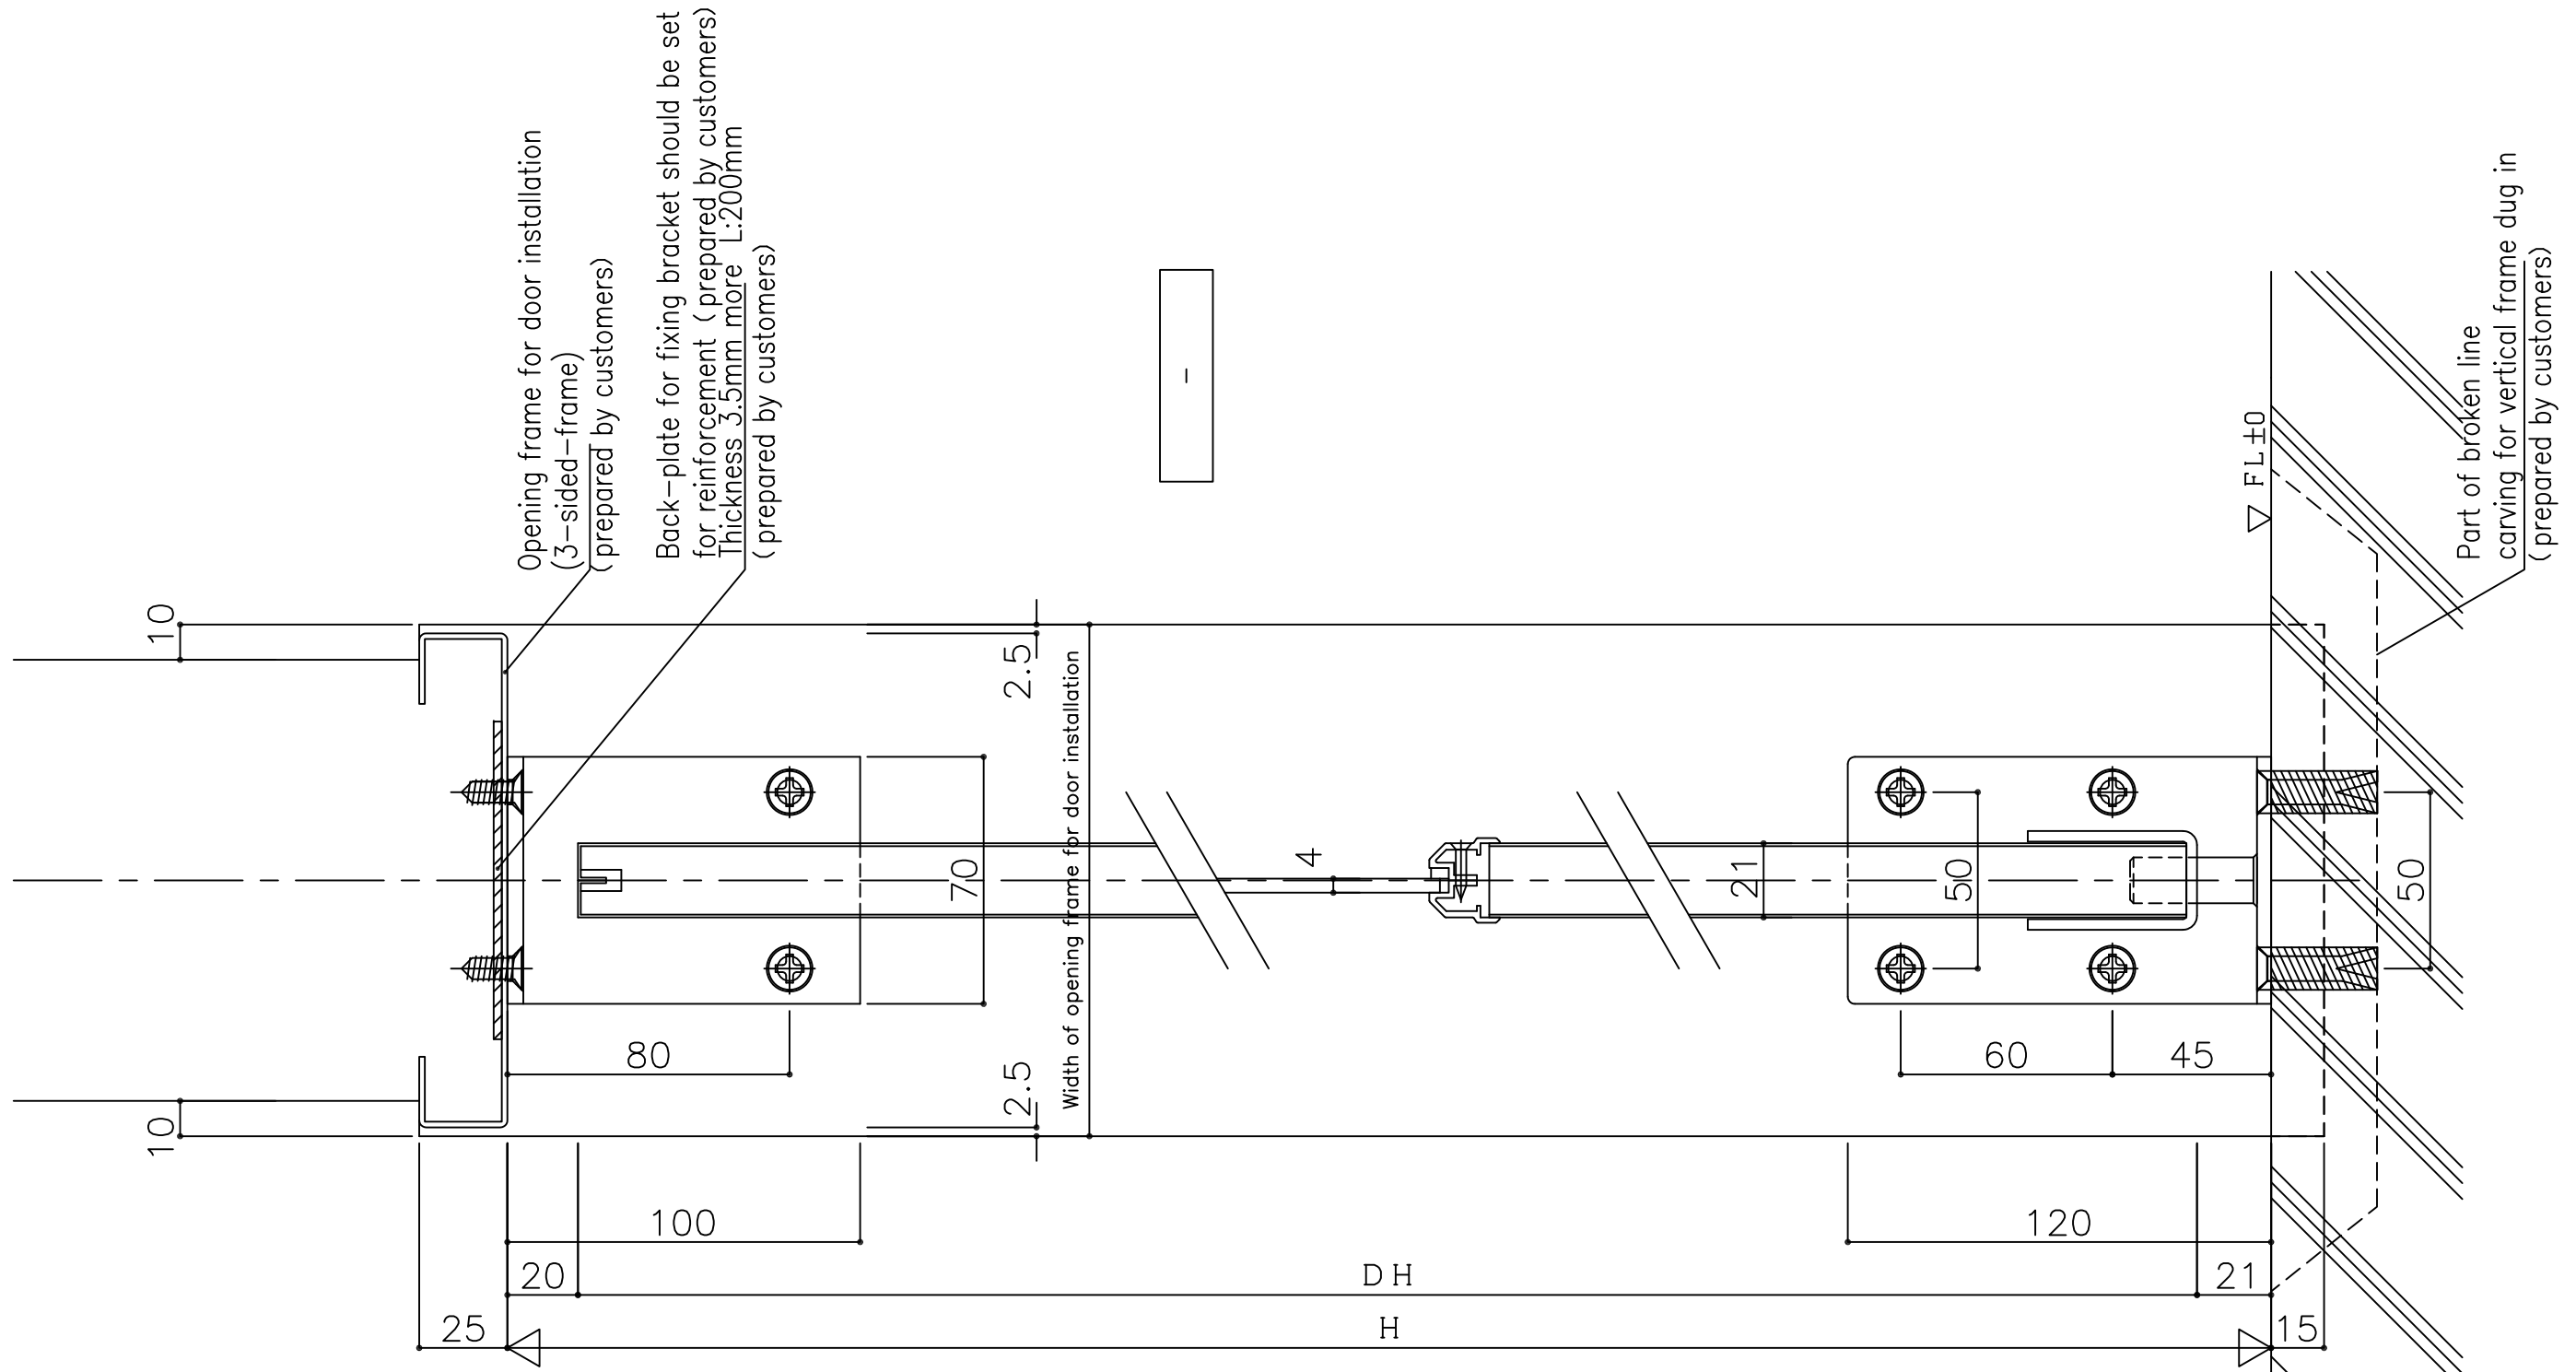

-

-





-	o	o	o	-
o	o	o	o	-
o	o	o	o	-
o	o	o	o	-

Drawing name  
UNIFLOW SWING DOOR  
SCP-3  
vertical section



Scale	-
1/2	Drawing No. -
/	Date - . - . -

Back-plate for fixing bracket should be set for reinforcement (prepared by customers)  
Thickness 3.5mm more L:200mm (prepared by customers)

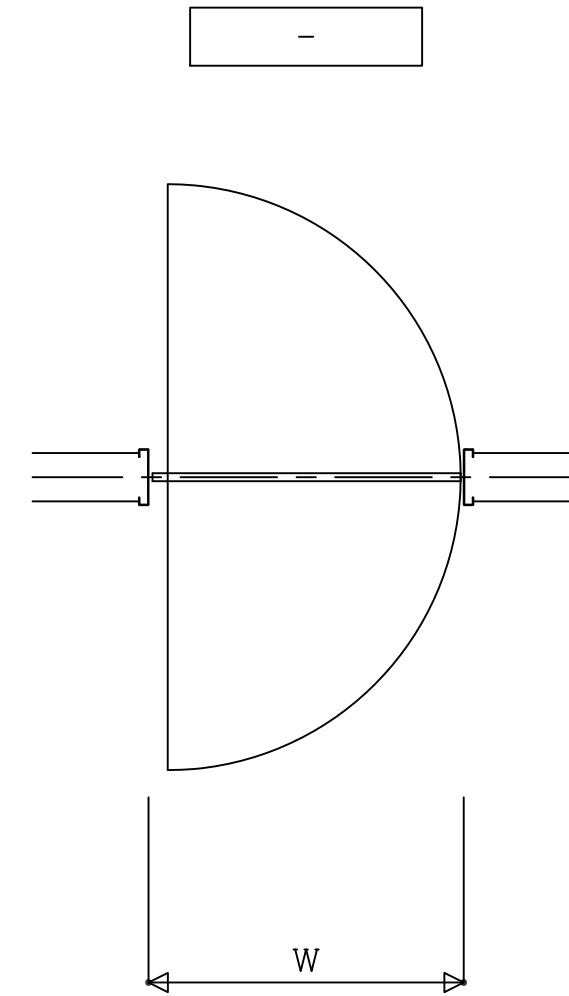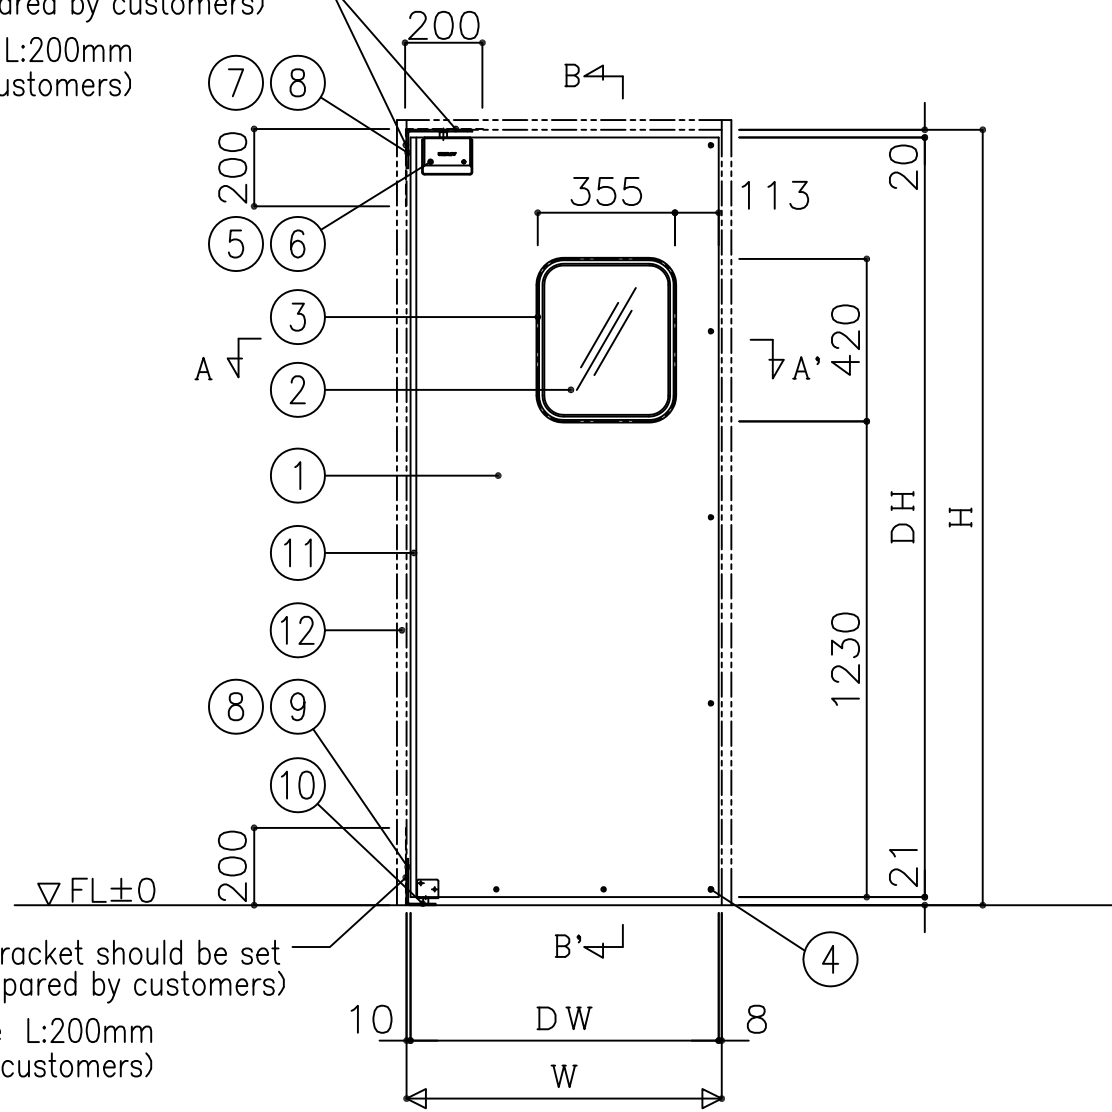

No.	Name	Material	Remark
1	Surface material	Stainless steel	thickness 0.8 mm
2	Window	Acrylic resin	color: transparent/thickness 4.0 mm
3	Window frame	Aluminum	color: alumite silver
4	Screw	Stainless steel	+A truss tapping/5x18
5	Hinge cover	ABS resin	130 mm x 97 mm x 25.7 mm
6	Hinge cover screw	Stainless steel	+roundhead in light grey/M4x8
7	Upper bracket in frame side	Steel SPC	Unichrome plating
8	Screw for bracket in frame side	Stainless steel	+flathead/M6 x 15
9	Lower bracket in frame side	Stainless steel	-
10	Screw for lower bracket in frame side	Stainless steel, PVC	+A flathead tapping 6 x 30, with PYplug 8 x 32
11	C-channel	Aluminum	NA-channel P, color: alumite silver
12	Opening frame for door installation (3-sided-frame)	-	Prepared by customers

Core of door • • lumber core  
Opening frame for door installation (3-sided-frame) and back plate for reinforcement should be prepared by customer.

Possible dimensions for production

	Single door	Double door
Opening width (W)	415 ≤ W ≤ 1200	830 ≤ W ≤ 2400
Opening height (H)	800 ≤ H ≤ 2400	

\* Windows cannot generally be installed in the door with DW < 400 OR DH < 900.

Window size

Door width (DW)	Window width	Window height
555 ≤ DW	355	420
400 ≤ DW < 555	200	420
DW < 400	No window	



\*Window sizes other than the above can be used depending on the height (H) and position of the window (to be confirmed)  
\* Minimum opening for window: w200 h250  
\* Vertical position of window: requires minimum 500 from door panel bottom edge and minimum 200 from door panel upper edge.

Code	How many	Where to install
⊖	-	~
Type	SWING DOOR SCP-3 (single door)	

Drawing name  
UNIFLOW SWING DOOR  
SCP-3 (single door)  
Image of basic installation



Scale  
1/20  
Drawing No. -  
Date - . - . -

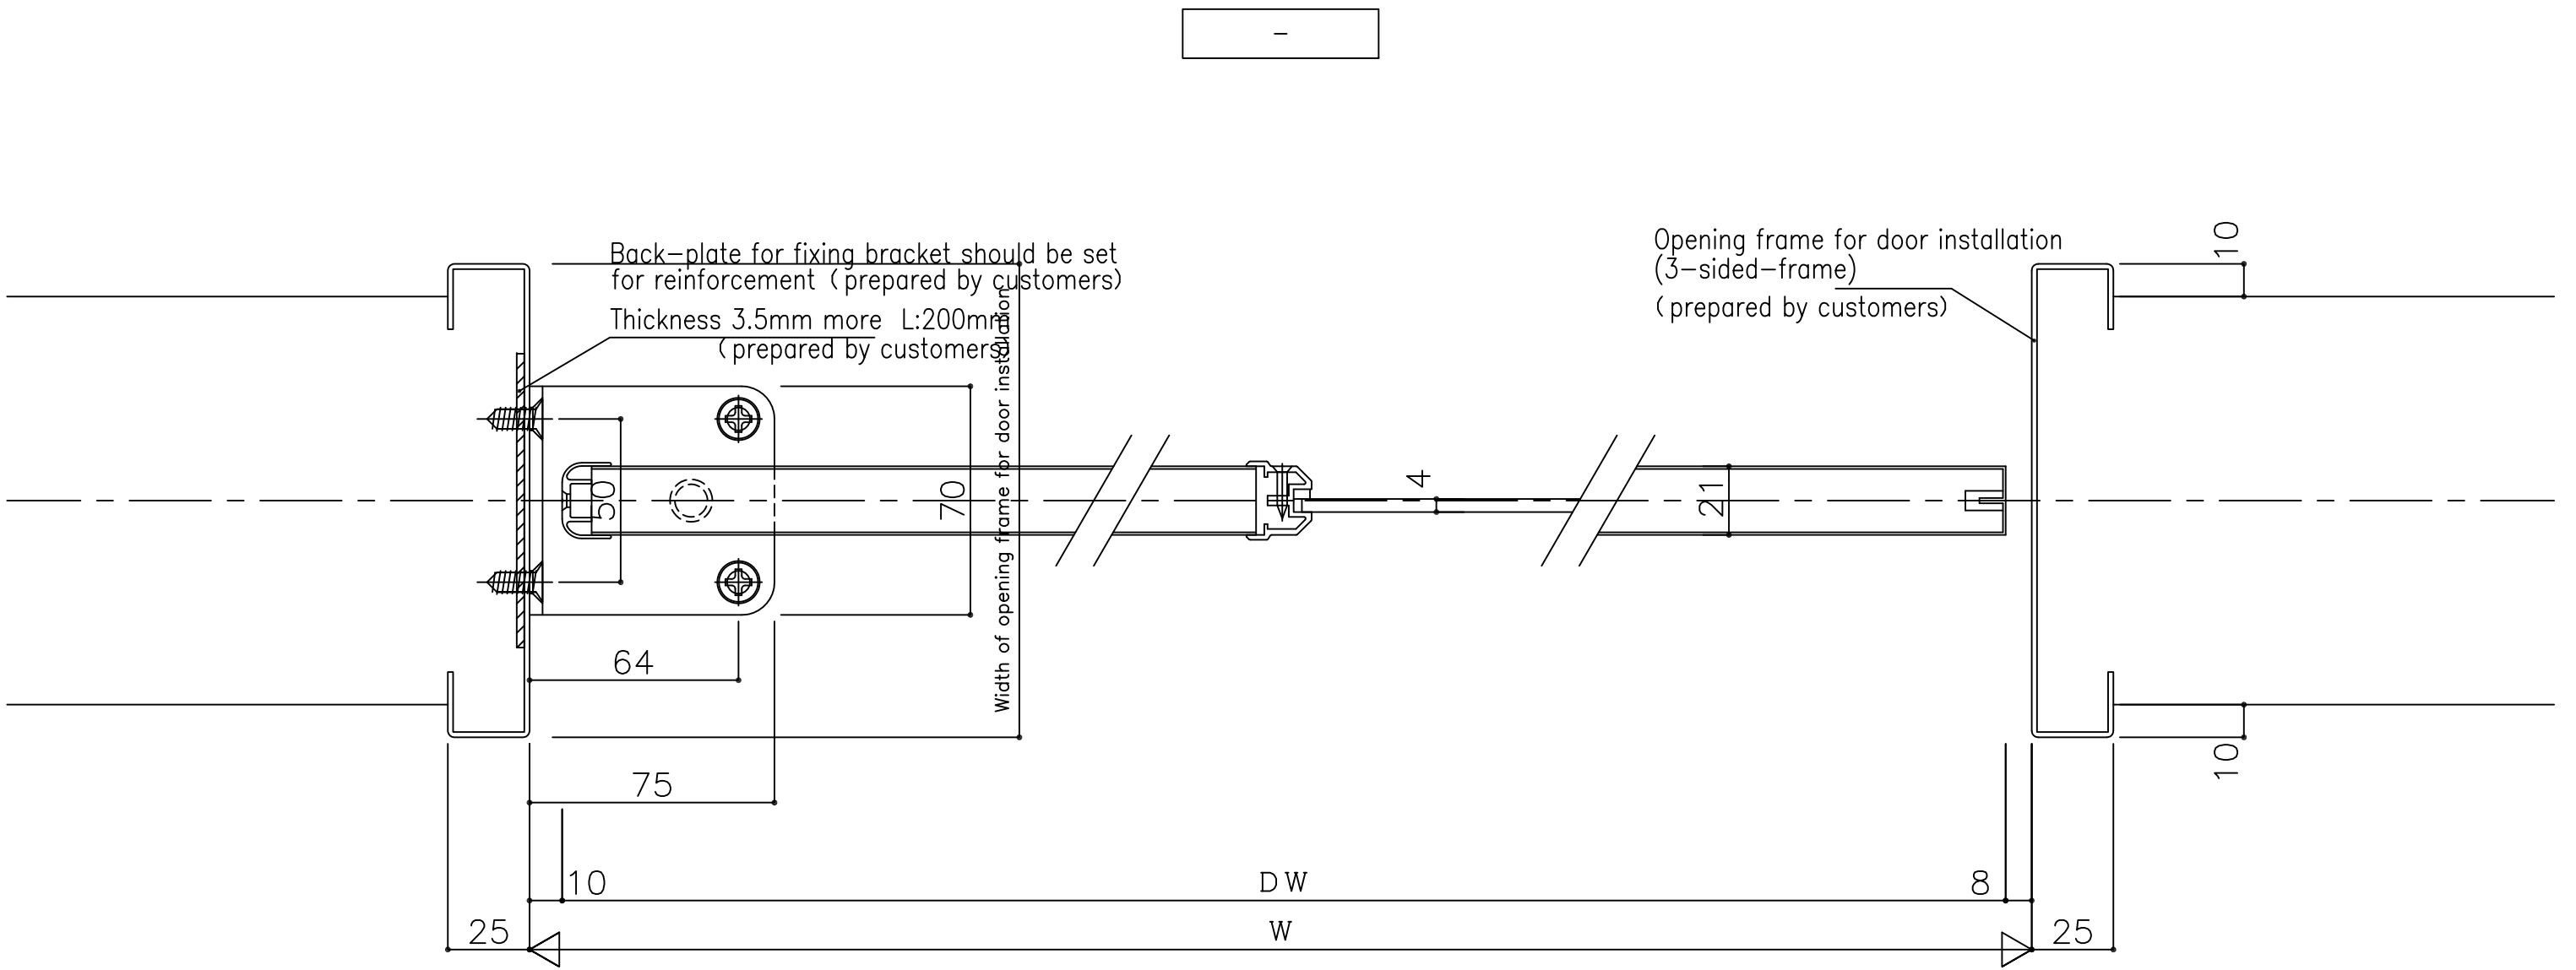


Drawing name  
UNIFLOW SWING DOOR  
SCP-3 (single door)  
cross section



Scale  
1/2  
/

Drawing No. -  
Date - . - . -



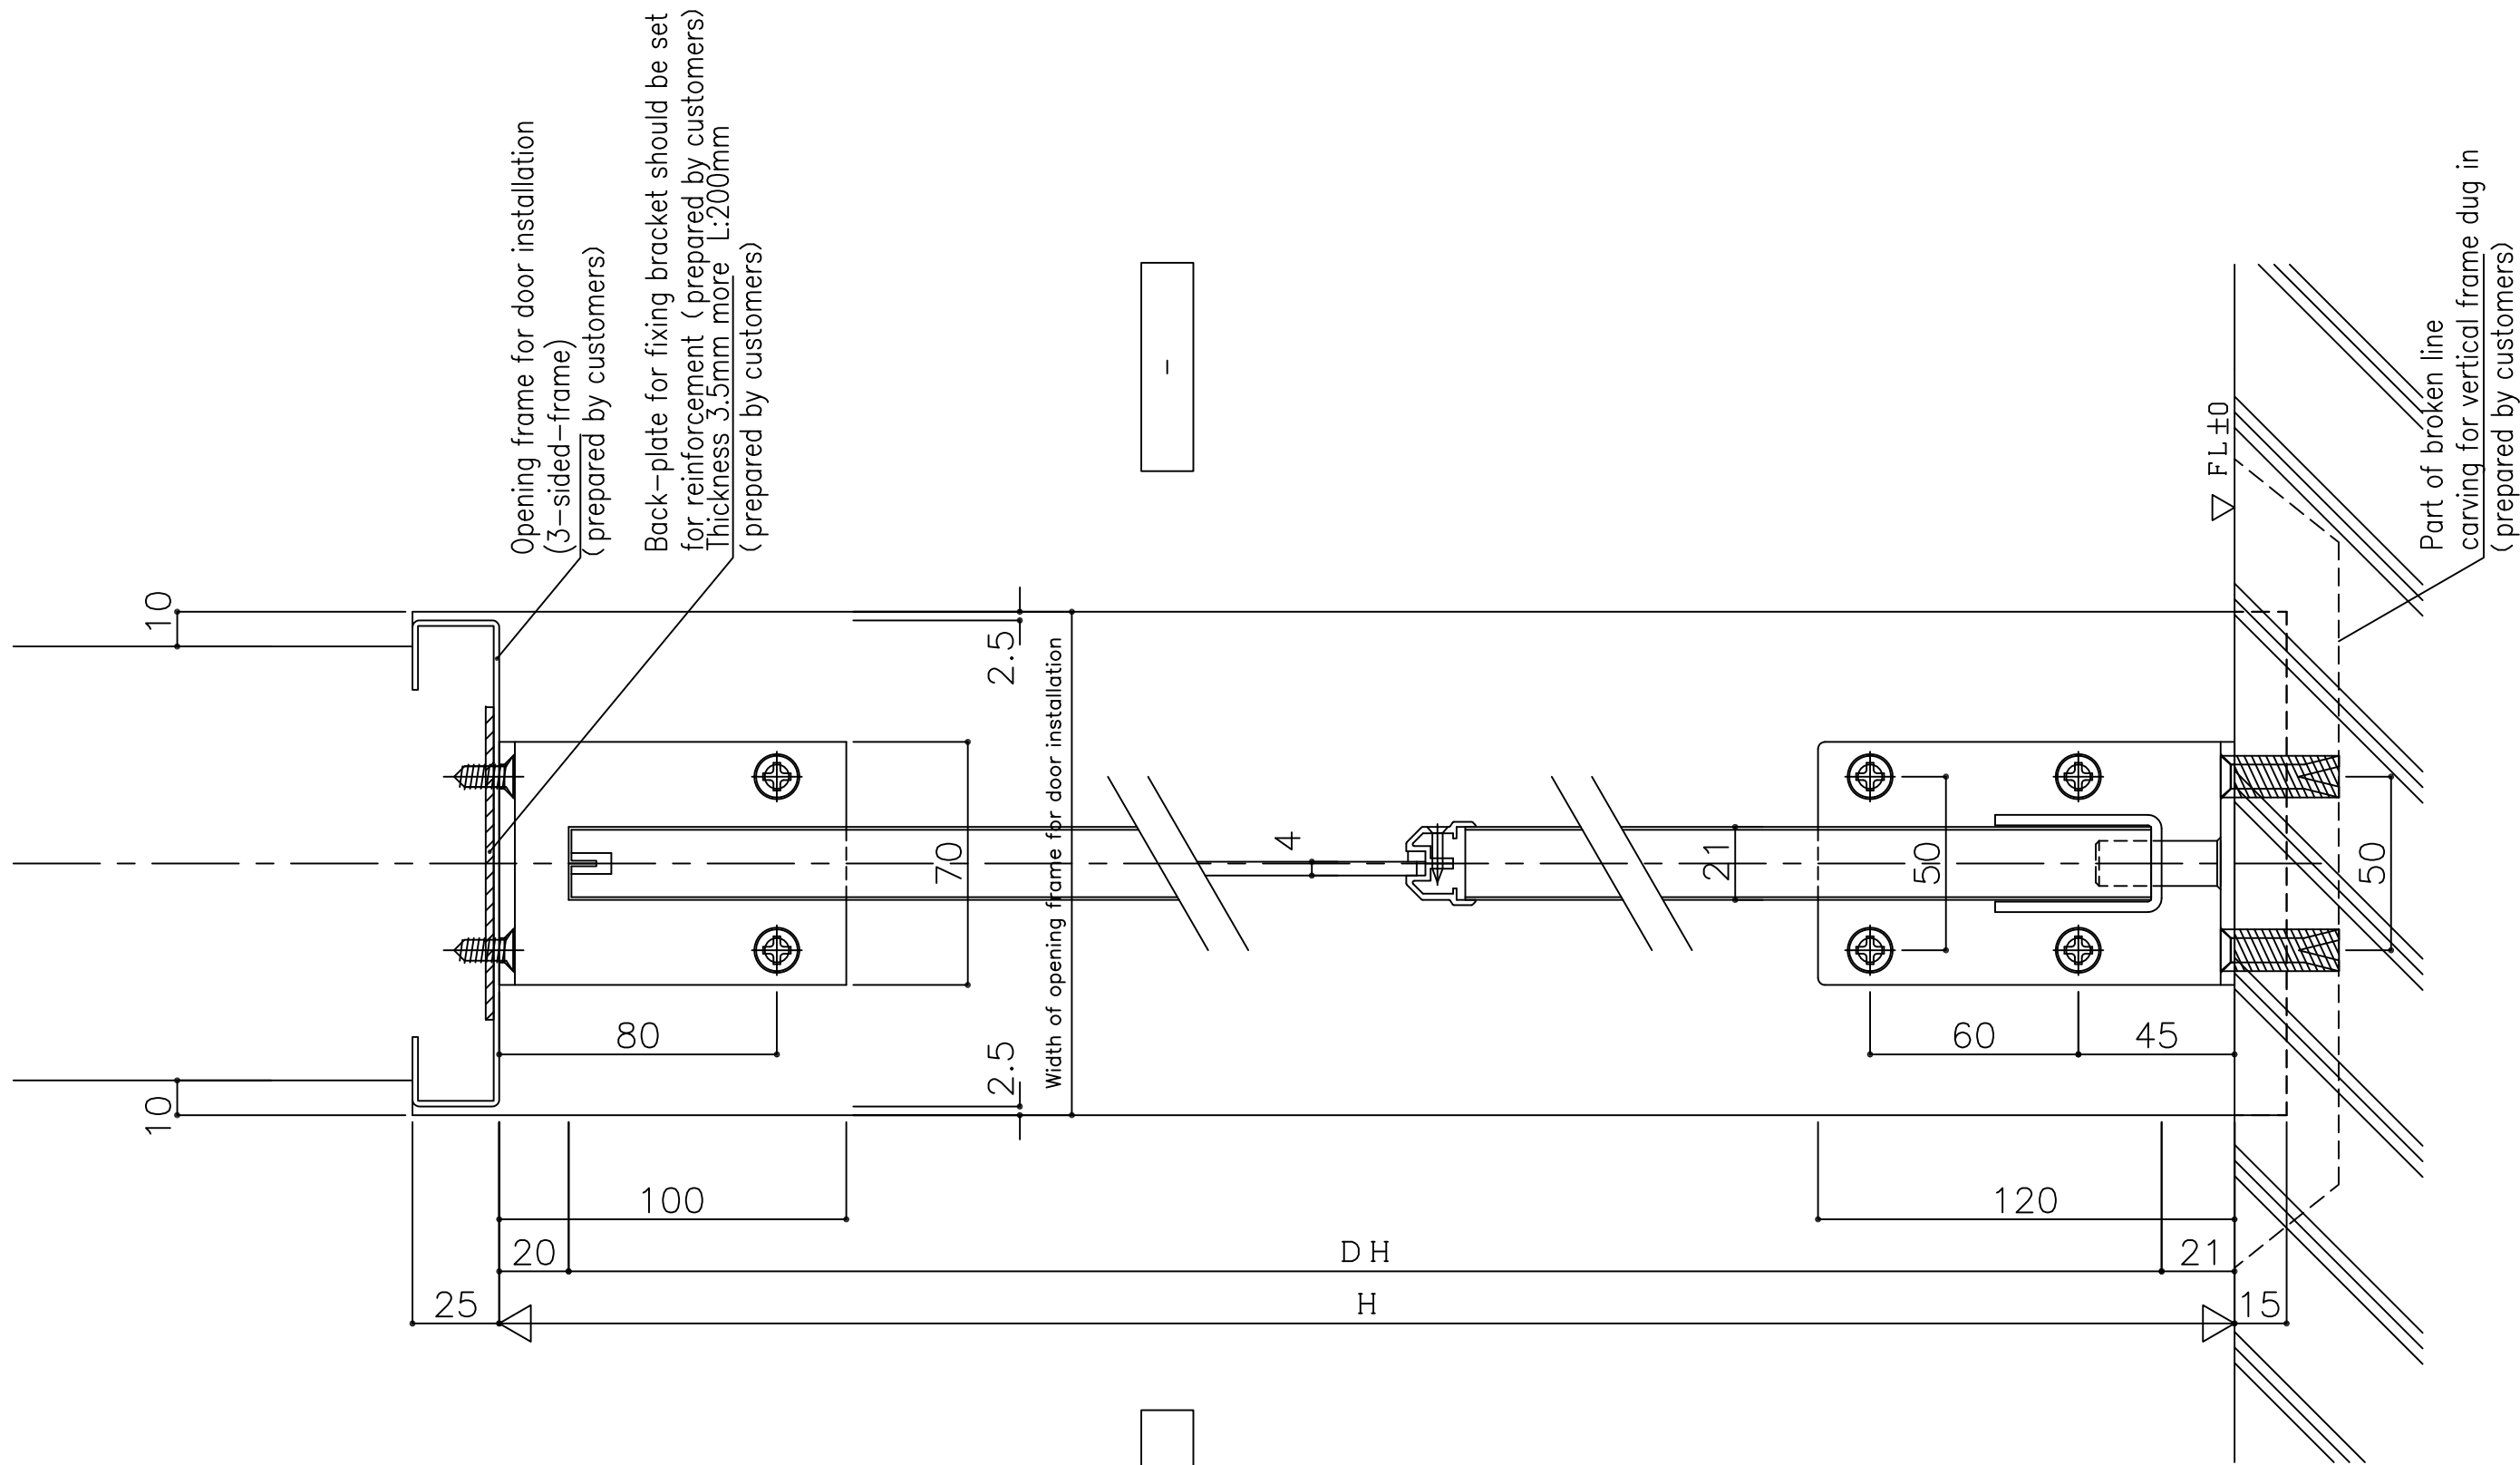

—	○	○	○	—
○	○	○	○	—
○	○	○	○	—
○	○	○	○	—

Drawing name  
UNIFLOW SWING DOOR  
SCP-3  
vertical section



Scale	1/2	—
Drawing No.	—	—
Date	—	—

